




DOGUS
A S A N S Ö R

www.dogus-elevator.com



Tavan
Seçenekleri



Kaplama
Seçenekleri



Taban
Seçenekleri

DSK-250



DSK-260



DSK-270



DSK-280



Taban
Seçenekleri



Kaplama
Seçenekleri



Tavan
Seçenekleri

DSK-290



DSK-300



DSK-310



DSK-320



Tavan
Seçenekleri



Kaplama
Seçenekleri



Taban
Seçenekleri

➤ **DSK-330**



➤ **DSK-340**



➤ **DSK-350**



➤ **DSK-360**



Taban
Seenekleri



Kaplama
Seenekleri



Tavan
Seenekleri

DSK-370



DSK-380



DSK-390



DSK-400



Tavan
Seçenekleri



Kaplama
Seçenekleri



Taban
Seçenekleri

DSK-410



DSK-420



DSK-430



DSK-440



Taban
Seçenekleri



Kaplama
Seçenekleri



Tavan
Seçenekleri

DSK-450



> DSK-460




> DSK-470



> DSK-480



*Tavan
Seçenekleri*



*Kaplama
Seçenekleri*



*Taban
Seçenekleri*

DSK-490



DSK-500



DSK-510



DSK-520



Taban
Seçenekleri



Kaplama
Seçenekleri




Tavan
Seçenekleri

DSK-530



DSK-540

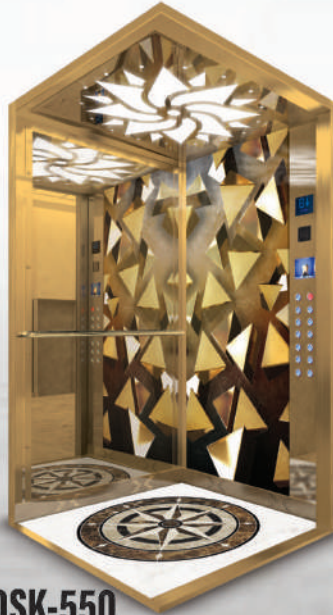


DSK-550



DSK-560



Tavan
Seçenekleri





Kaplama
Seçenekleri



Taban
Seçenekleri

DSK-570

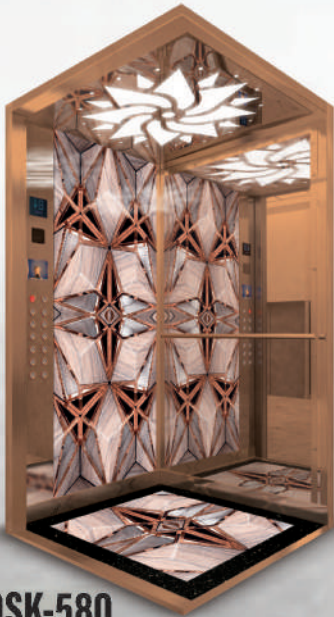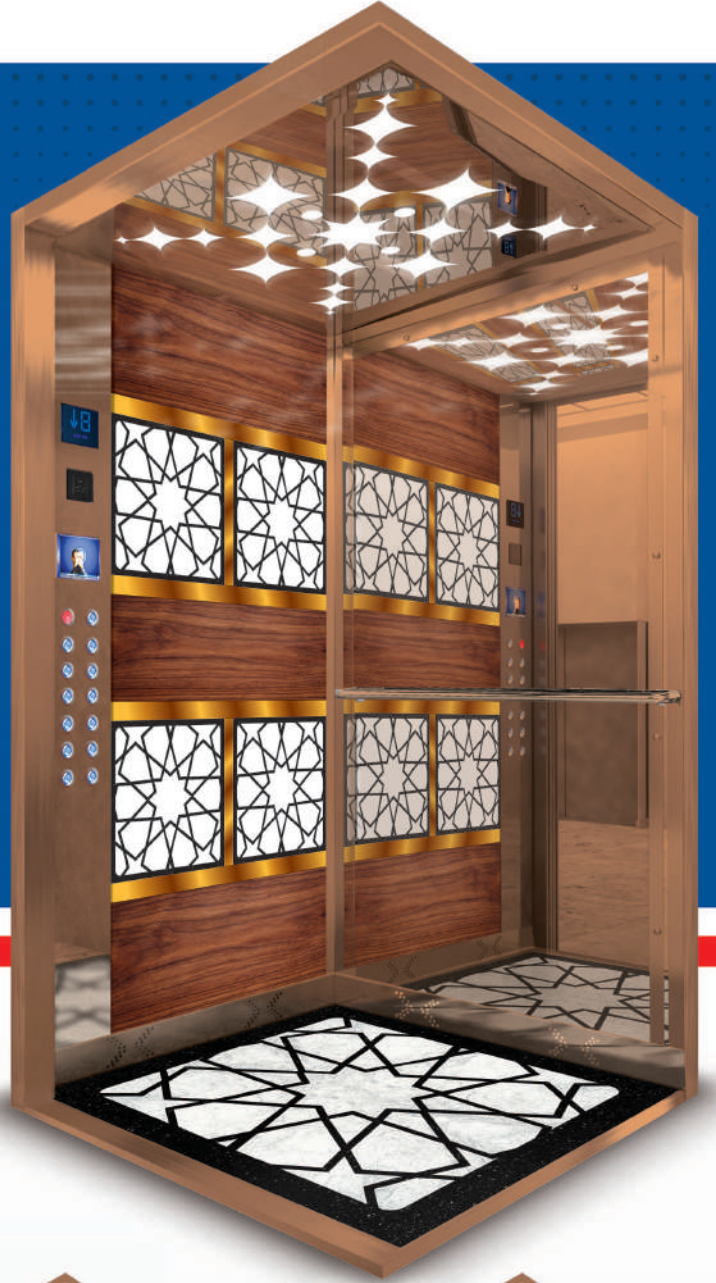

DSK-580



DSK-590



DSK-600



Taban
Seçenekleri



Kaplama
Seçenekleri



Tavan
Seçenekleri

DSK-610



> DSK-620



> DSK-630



> DSK-640



DSK-650



DSK-660



DSK-670



DSK-680

Yük Asansörü

Freight Elevator | مصعد الشحن

ÖZELLİKLER

- 1,5 mm sac
- Satine paslanmaz yan duvarlar
- Lazer tavan
- Kolay takılabilir küpeşte
- Aydınlatma ve havalandırma bağlantıları
- Alüminyum çeta taban
- Farklı taban seçenekleri
- Tercihe bağlı sandık ambalaj
- Titreşimi önleyen özel bükümler ve takozlar

FEATURES

- 1.5 mm iron sheet
- Satine stainless side walls
- Laser ceiling
- Easily installed rail
- Lighting and ventilation connections
- Aluminium knurled ceta base
- Different base options
- Optional packing crate
- Special bends and dampers that prevent vibration

الميزات

- 1.5 mm المجلفن
- الجدران الجانبية الساتلية
- سقف الليزر
- درابزين
- الإضاءة والتهوية
- أرضية الألومنيوم
- خيارات الأرضيات
- عند الطلب صندوق
- الانحناءات الخاصة والمخمدرات التي تمنع الاهتزاز



Panoromik Kabin

Panoramic Cabin | كابينة بانورامية

ÖZELLİKLER

- 1,2 mm sac kabin duvarları
- Paslanmaz çelik
- Hem iç hem dış paslanmaz kaplama
- Tamamı lazer kesimli parçalar
- Üç cepeye kadar cam seçeneği
- Farklı taban ve tavan seçenekleri
- Oval cam seçeneği
- Lamine cam koruma sertifikalı

FEATURES

- 1,2 mm sheet metal cabin wall
- Quality stainless steel
- Both internal and external stainless coating
- All parts are laser cut
- Glass options up to three sides
- Different floor and ceiling options
- Oval glass option
- Laminate glass -certification

المميزات

- 1,2 مم جدران خزائنة من الصفائح المعدنية
- من الفولاذ المقاوم للصدأ
- طلاء داخلي وخارجي غير قابل للصدأ
- جميع قطع الليزر
- خيار زجاجي مع ما يصل إلى ثلاثة جيوب
- خيارات مختلفة للأرضية والسقف
- خيار الزجاج البيضاوي
- شهادة حماية الزجاج الرقائقي




Dekoratif Paslanmaz

Decostyle Stainles | الستلس المزخرف




DG-03




DM-17




DM-10




DM-01



5-WL



DM-15



DM-09



DM-21




DG-25




DM-02




DG-10



DM-24




E-58



DM-09




DM-05



DM-13



DM-04



DG NOKTA



DG-05




DG-02



DG-06

Cam ve MDF Kaplama

Glass and MDF Coated | زجاج و MDF مغطى

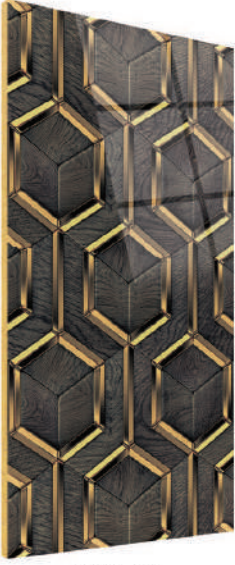

DCM-10



DCM-20



DCM-30



DCM-40



DCM-50



DCM-60



DCM-70



DCM-80



DCM-90




DCM-100




DCM-110



DCM-120

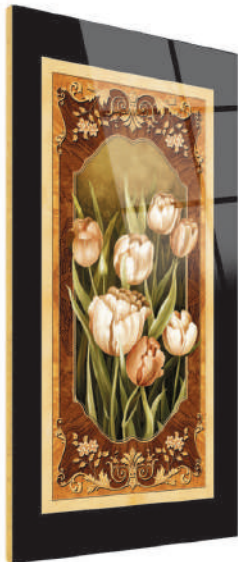

DCM-130

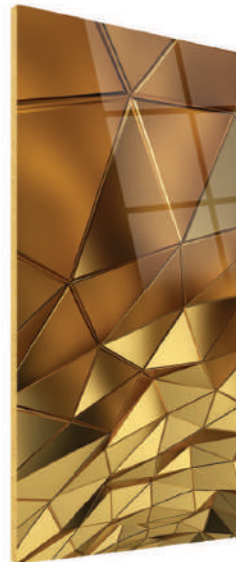


DCM-140



DCM-150

Cam ve MDF Kaplama

Glass and MDF Coated | زجاج و MDF مغطى

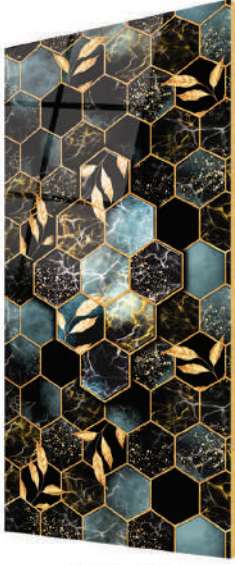

DCM-160



DCM-170




DCM-180



DCM-190



DCM-200

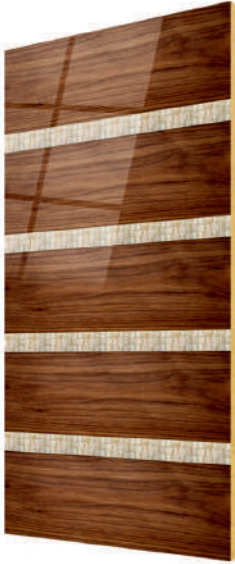


DCM-210



DCM-220




DCM-230

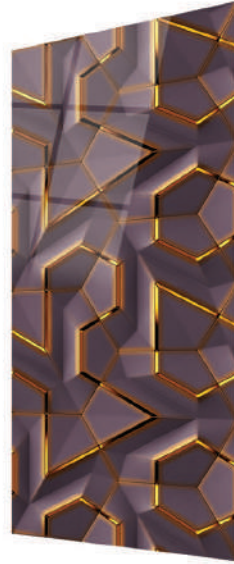

DCM-240



DCM-250

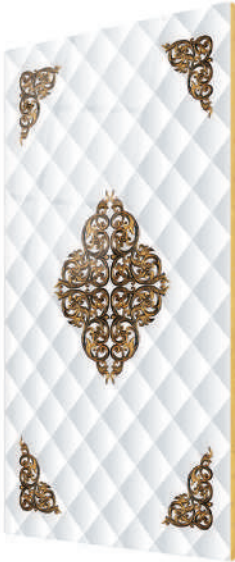


DCM-260



DCM-270



DCM-280

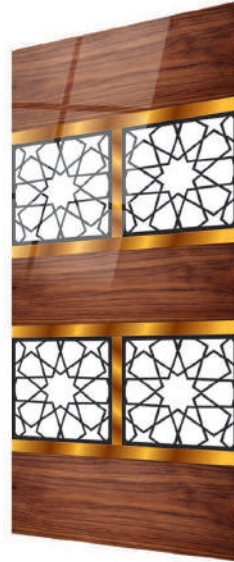

DCM-290



DCM-300

Cam ve MDF Kaplama

Glass and MDF Coated | زجاج و MDF مغطى



DCM-310



DCM-320



DCM-330



DCM-340



DCM-350



DCM-360



DCM-370



DCM-380



DCM-390




DCM-400



DCM-410



DCM-420

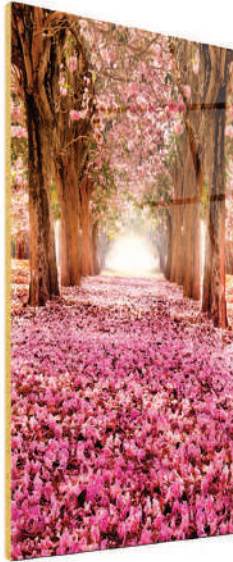

DCM-430



DCM-440



DCM-450

Cam ve MDF Kaplama

Glass and MDF Coated | زجاج و MDF مغطى



DCM-460



DCM-470



DCM-480



DCM-490



DCM-500



DCM-510



DCM-520



DCM-530



DCM-540



DCM-550



DCM-560



DCM-570



DCM-580



DCM-590



DCM-600

Taban Seçenekleri

Group Options | خيارات ارضي

Cam | Glass | صنوبر



DTB-10




DTB-20



DTB-30



DTB-40

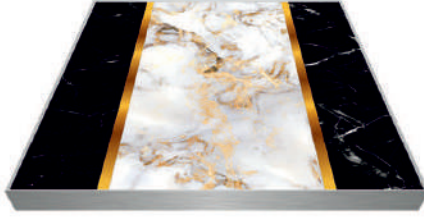

DTB-50




DTB-60




DTB-70



DTB-80

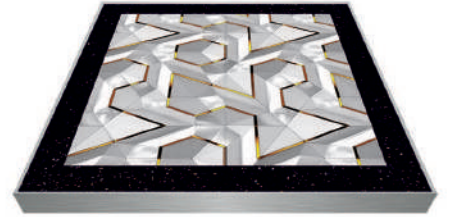

DTB-90

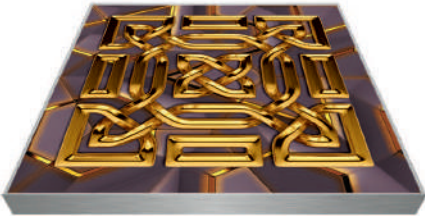


DTB-100



DTB-110



DTB-120

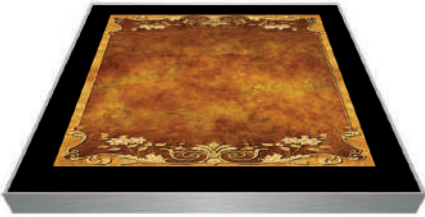

DTB-130



DTB-140



DTB-150

Özel Seramik Taban Seçenekleri | Special Ceramic Floor Options | أرضية سيراميك خاصة



BASRA ALTIN



CASBLANCA ALTIN



LUSAKA ALTIN

Taban Seçenekleri

Group Options | خيارات ارضي


PVC | PVC | PVC



DTB-160



DTB-170

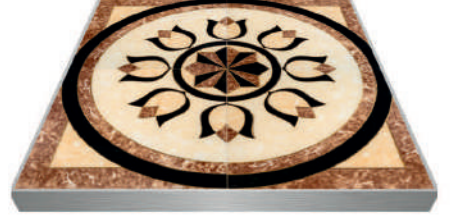

DTB-180



AEZ-149



AEZ-150



AEZ-152



AEZ-153




AEZ-157




AEZ-211



AEZ-151

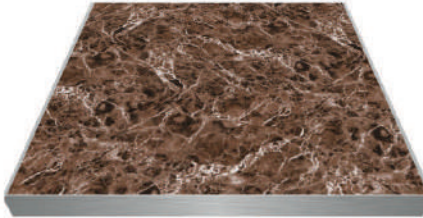


AEZ-210

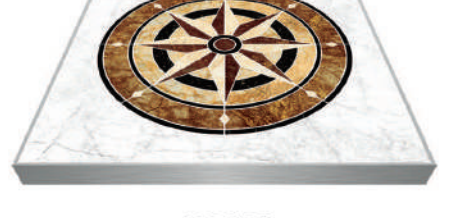


AEZ-156



PVC-ES-5

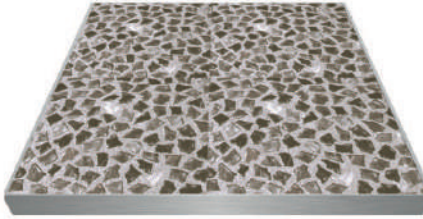

PVC-3714

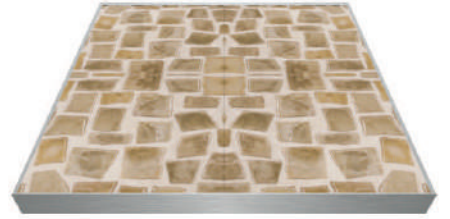

PVC-1341

Granit | Granite | جرانيت



ROSA PORINHO




STAR GALAXY




AKSARAY YAYLAK

Tavan Seçenekleri


Ceiling Options | خيارات السقف




DTV-10




DTV-20




DTV-30




DTV-40




DTV-50



DTV-60




DTV-70




DTV-80




DTV-90




DTV-100




DTV-110




DTV-120




DTV-130




DTV-140




DTV-150




DTV-160




DTV-170



DTV-180




DTV-190




DTV-200

Tavan Seçenekleri


Ceiling Options | خيارات السقف




DTV-210




DTV-220




DTV-230




DTV-240




DTV-250



DTV-260




DTV-270



DTV-280




DTV-290




DTV-300




DTV-310




DTV-320




DTV-330




DTV-340




DTV-350




DTV-360




DTV-370



DTV-380




DTV-390



DTV-400

Taş Seçenekleri

Stone Options | خيارات الحجر



S-10



S-20



S-30



S-40



S-50



S-60



S-70



S-80



S-90




S-100



S-110



S-120



S-130



S-140



S-150



S-160



S-170



S-180




S-190



S-200


L SiSTEM

L system

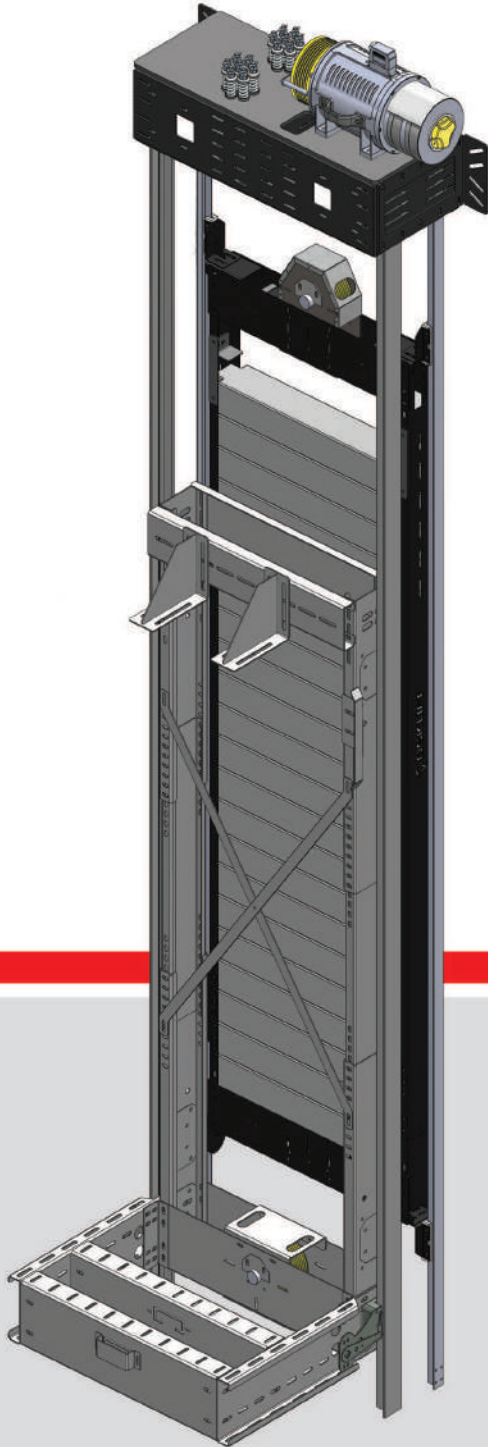

MRL SiSTEM 1

Mrl system 1

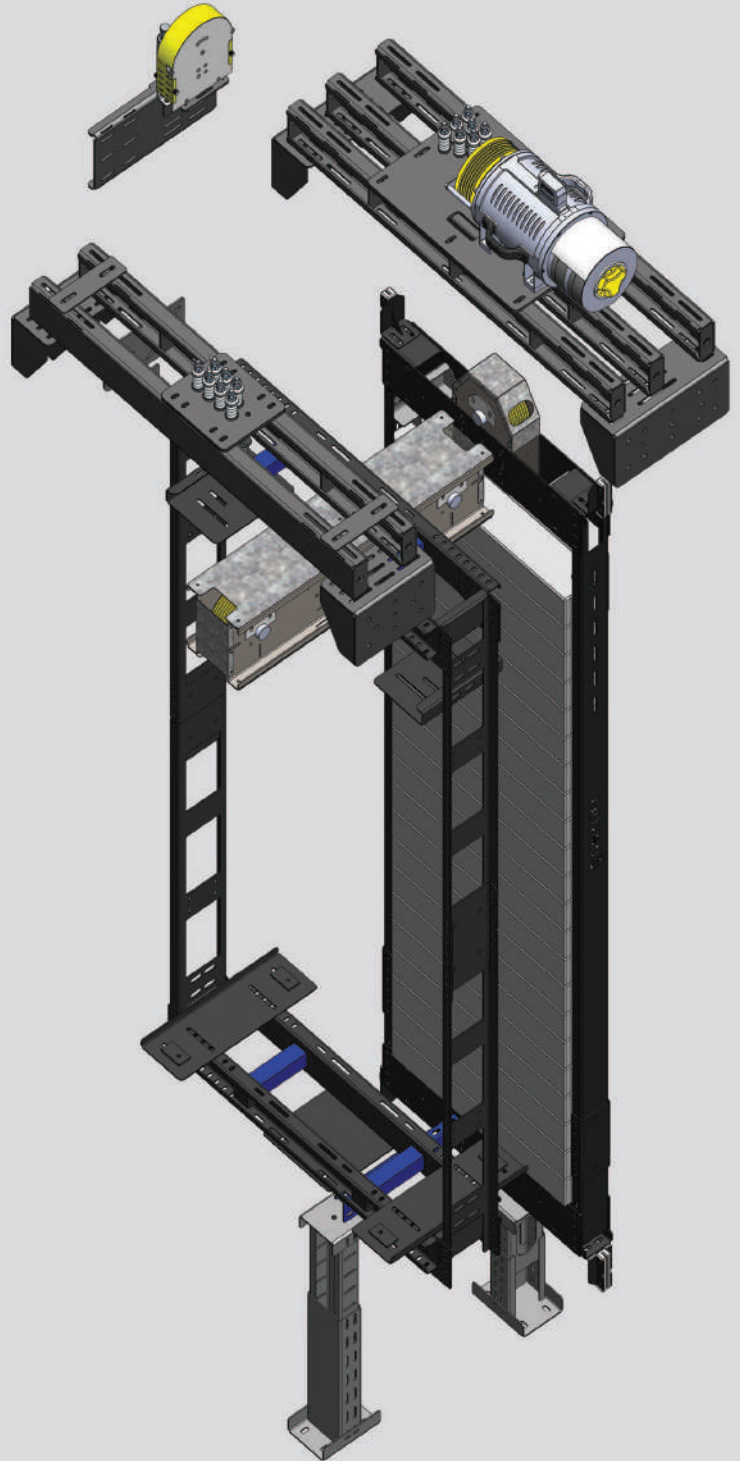


Süspansiyon ve Şaseler

Suspension and Chassis
التعليق والهيكل


MRL SiSTEM 2

Mrl system 2

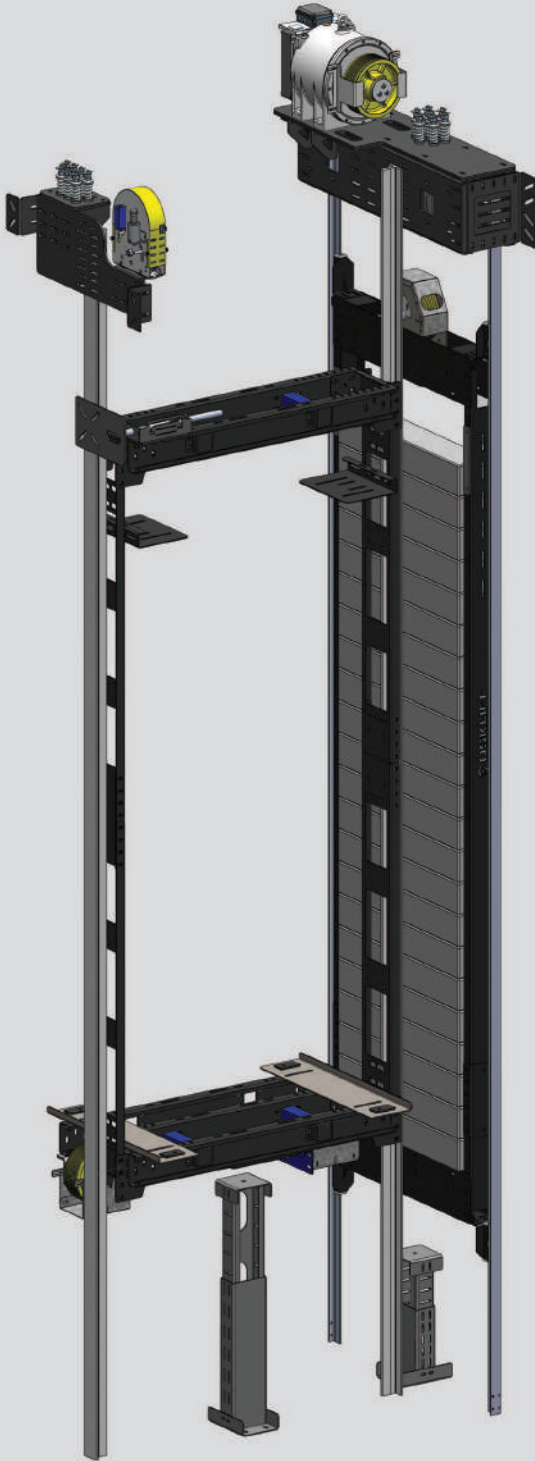





MR SiSTEM

Mr system

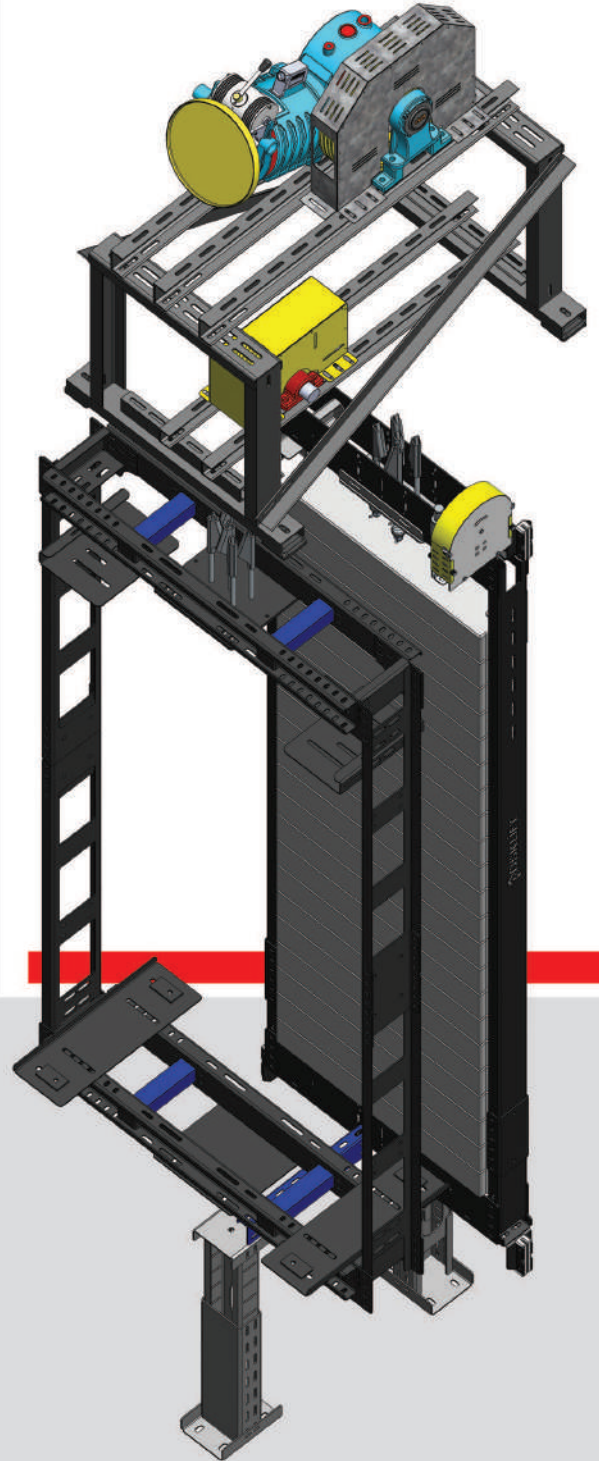




Süspansiyon ve Şaseler

Suspension and Chassis
التعليق والهيكل

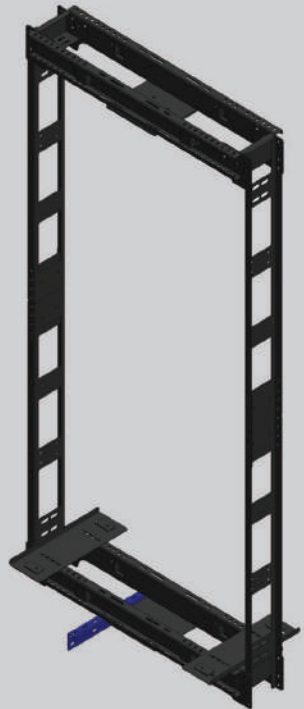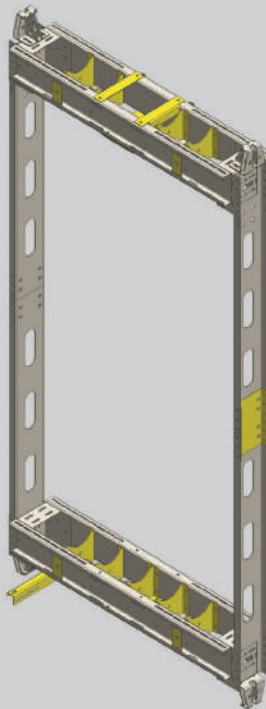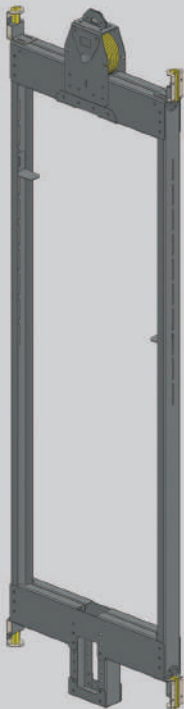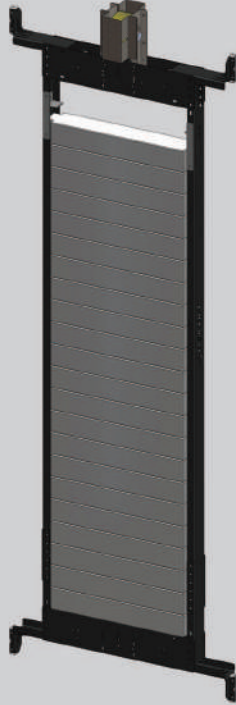




Süspansiyon ve Şaseler

Suspension and Chassis
التعليق والهيكل

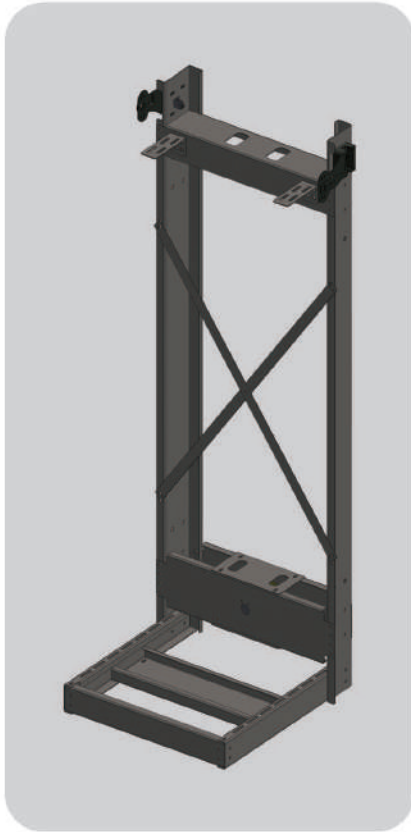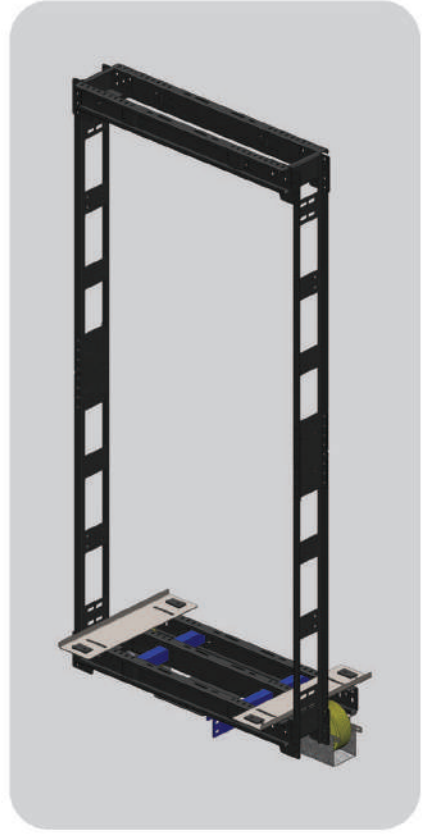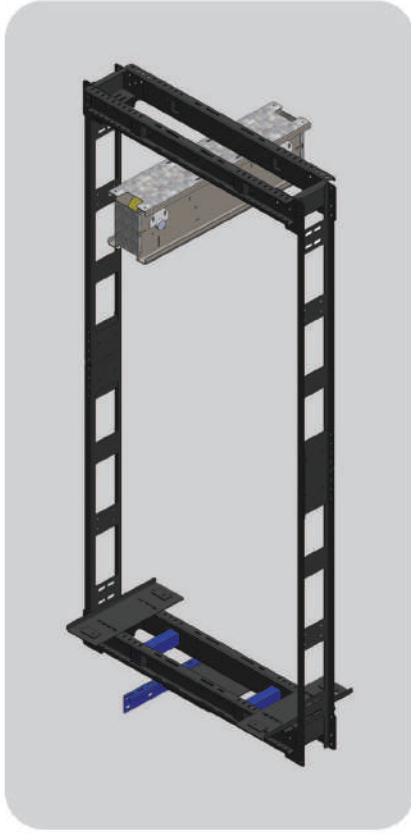

Makina Şaseleri






Machine Chassis
هيكل الآلة

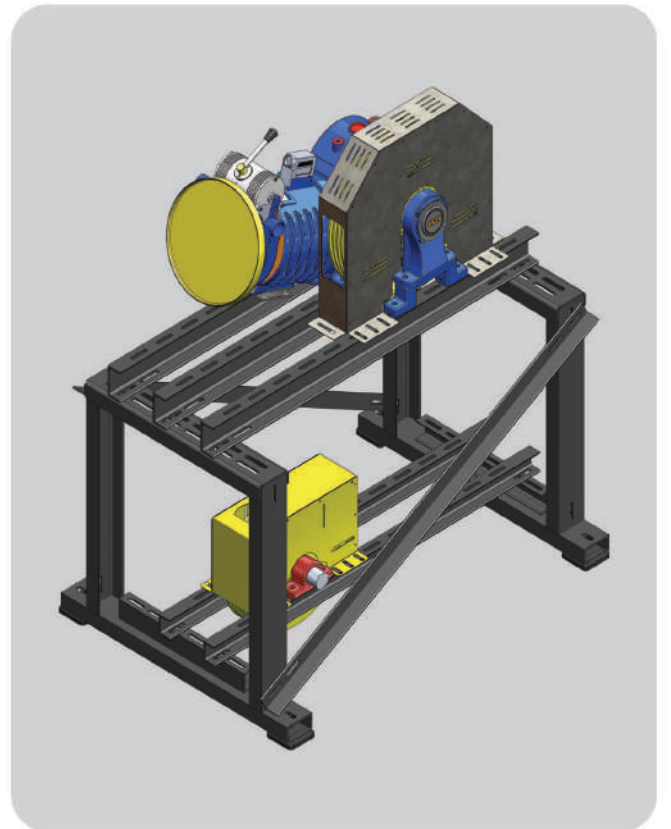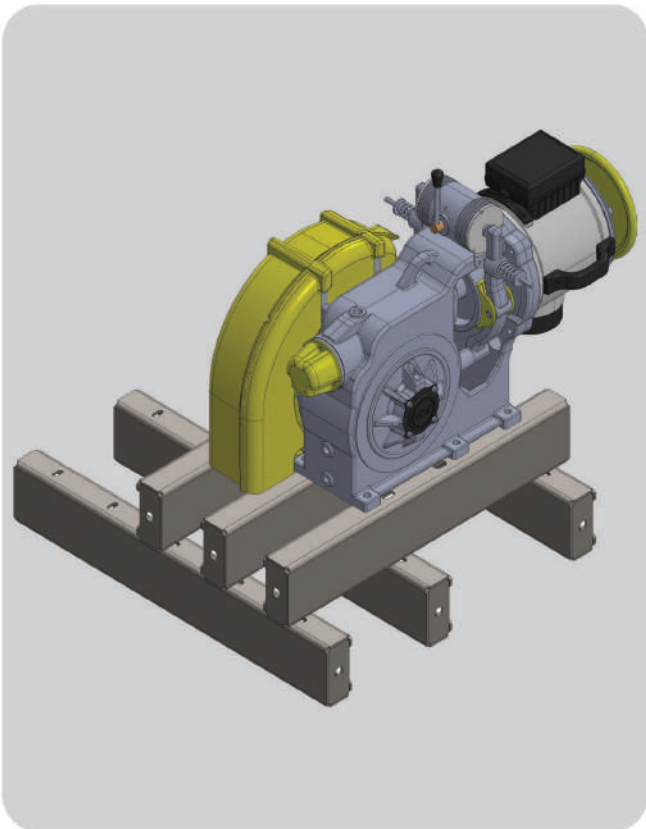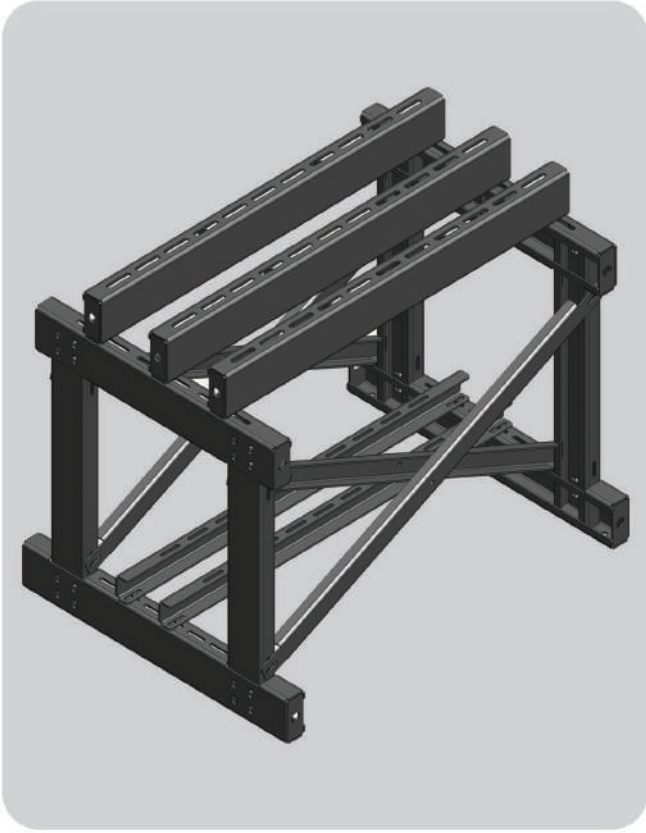

Makina Şaseleri

Machine Chassis



هيكل الآلة

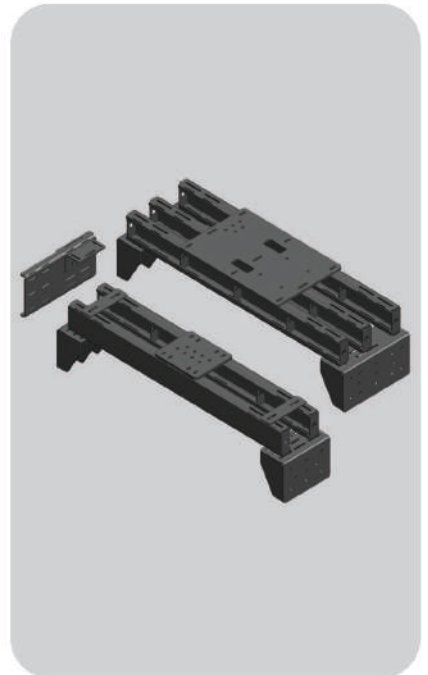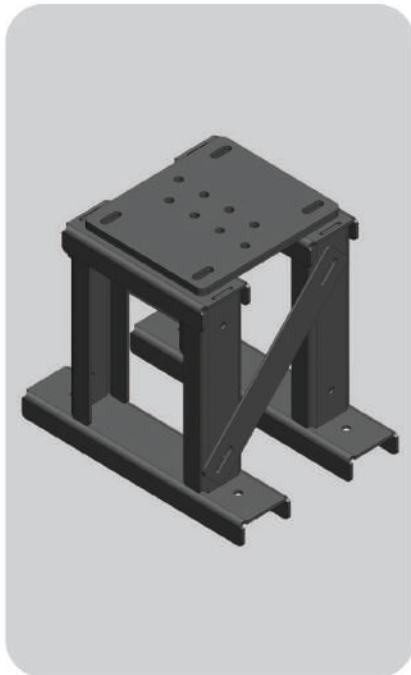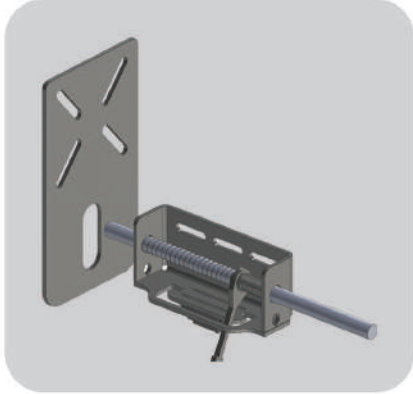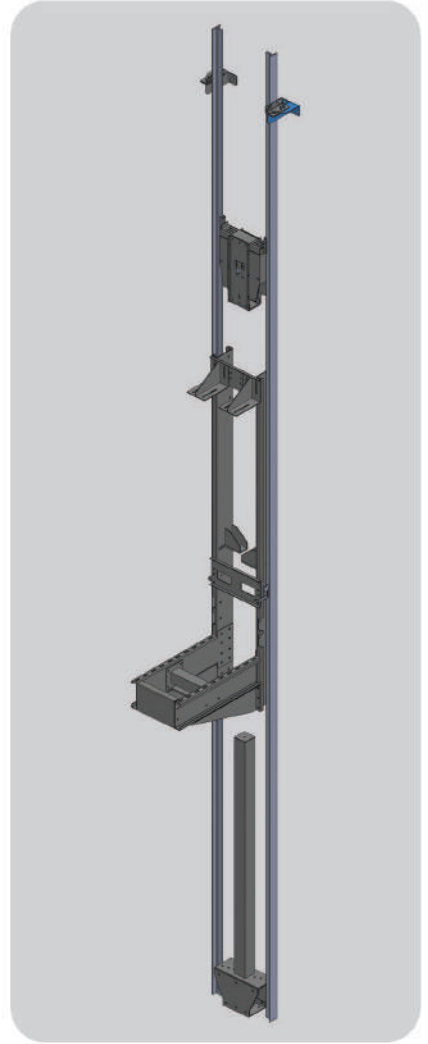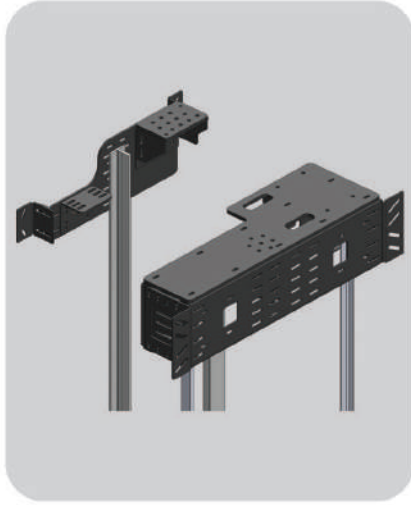

Çelik Konstrüksiyon

Steel construction

البناء الصلب

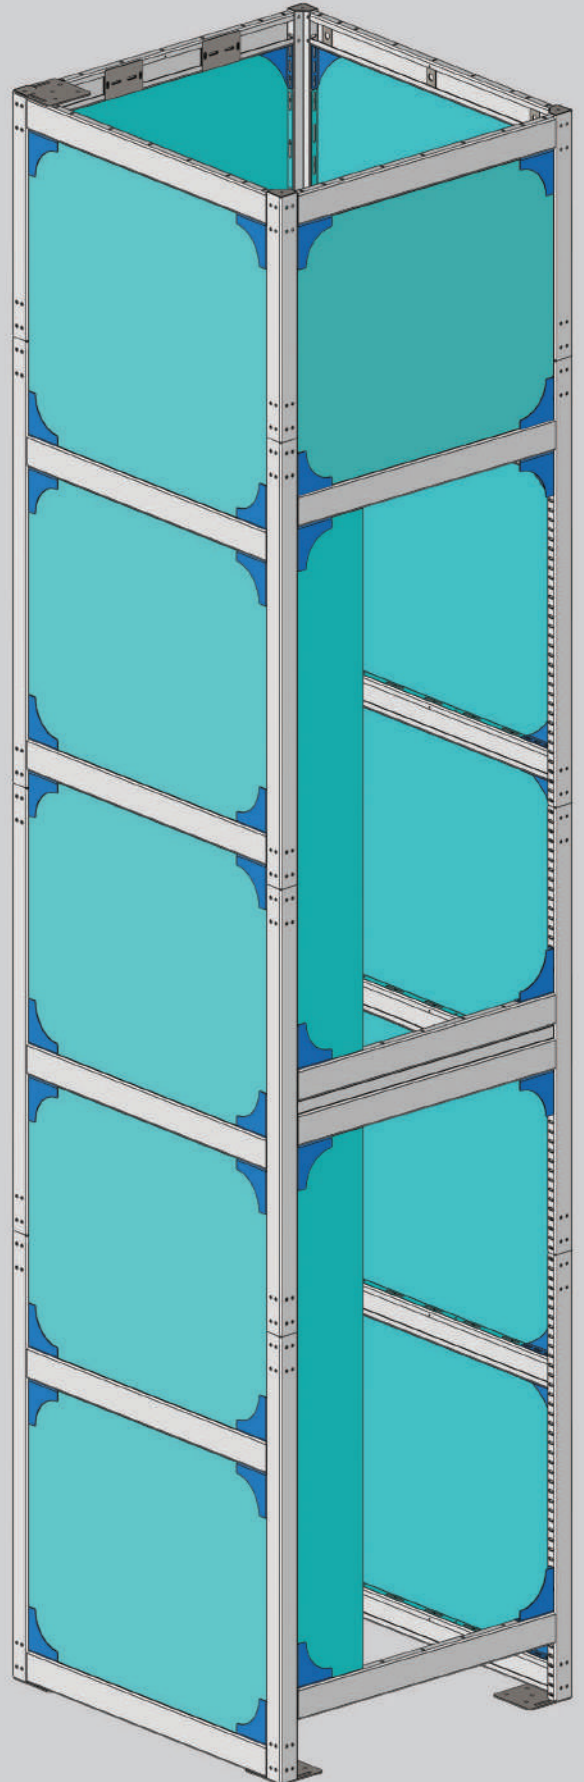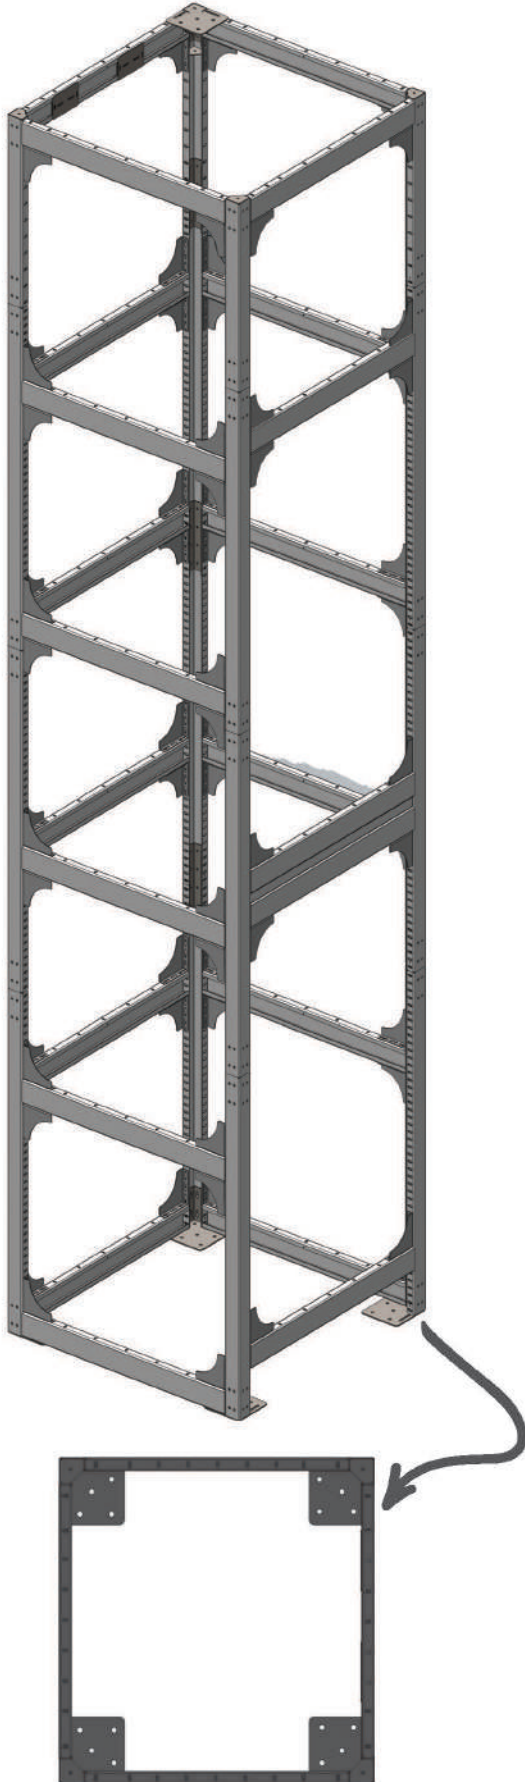





Otomatik Kapılar

Automatic Door | الباب الأوتوماتيكي



2 panel teleskopik
kat kapısı

Otomatik Kapılar

Automatic Door | الباب الأوتوماتيكي



2 panel teleskopik
kabin kapısı



Otomatik Kapılar

Automatic Door | الباب الأوتوماتيكي



2 panel
iç güvenlik
kapısı

Kat Kapıları

Landing Door | باب الهبوط



Kat Kapıları

Landing Door | باب الهبوط



Makine Motorlari

Machine Motors | محرك الآلة



ELEGANCE ELITE 7,5



ELEGANCE PLUS 7,5



STRONG LITE 7,5



SMART 4



FORCE 22



STRONG PLUS 15



STRONG-9



QS-2



QS-3



QS-4



QS-6

Makine Motorları

Machine Motors | محرك الآلة




GEM-135B



GEM-140D



GEM-WTD-2



GEM-WTD-1



SASSI-TORO



SASSI-MODY



SASSI-S38



SASSI-G200-T1



SICOR-VS630



SICOR-S2V1250



SICOR-SV480




SICOR-SMRL480



MONTANARI-M83



MONTANARI-M85



MONTANARI-MGV34 M



MONTANARI-MGV25S

Makine Motorları

Machine Motors | محرك الآلة



VOLARE TRND TSK-2



AKAR



JUPA



AKAR



VOLTRON



NAGEL ÖZGEN



NAGEL KAYRA



NAGEL PARS




NAGEL



NAGEL



NAGEL KLASİK



WITTUR




CSAG-D



CSAG-K



CSAG-M



CSAG-T

Kumanda Panoları

Control Panels | لوحات التحكم



Dışisiz Pano
Gearless Control Panel
لوحة التحكم للمحركات بدون تروس

Dışilili Pano
Geared Control Panel
لوحة التحكم مع غرفة المحرك



Revizyon Kutusu
Revision Box
صندوق المراجعة



Kumanda Panoları

Control Panels | لوحات التحكم

El Terminali | AREM Terminal



ARLINE Uzaktan İzleme, Alarm ve İnterkom Sistemi | ARLINE System

Dışlısız Pano Gearless Control Panel لوحة التحكم للمحركات بدون تروس



Dışlılı Pano Geared Control Panel لوحة التحكم مع غرفة المحرك



Revizyon Kutusu Revision Box صندوق المراجعة



Kumanda Panoları

Control Panels | لوحات التحكم

HEDEFSAN®
ASANSÖR KONTROL SİSTEMLERİ

Dişlisiz Pano
Gearless Control Panel
لوحة التحكم للمحركات بدون تروس

Dişli Pano
Geared Control Panel
لوحة التحكم مع غرفة المحرك

Revizyon Kutusu
Revision Box
صندوق المراجعة



Buttons | أزرار



Butonlar



Butonlar

Buttons | أزرار



ASB 2500-B9 ASB 7000-B2 ASB 5000-B1 ASB 7000-B1 ASB 6000-B1 ASB 4000-B6 ASB 1000-B1 ASB 2000-B3 ASB 2000-B1 ASB 6100-B4 ASB 800-B3





AVANTGARDE AVANTGARDE ASB 420D-S3 ASB 420D-S5 ASB 130-S1 ASB 130-S4 ASB 420 D-S2 ASB 425-MONŞARI







ASB 300-S2 ASB 600-S2 ASB 600-S1 ASB 420 Y-S3 ASB 450-S1 ELEGANCE-S6 ASB 200-S3 ASB 200-S2

AHTAPOT YANDAN AĞIRLIK SİSTEMİ 1 / AHP-01-F
OCTOPUS SIDE COUNTER WEIGHT BRACKET SYSTEM 1

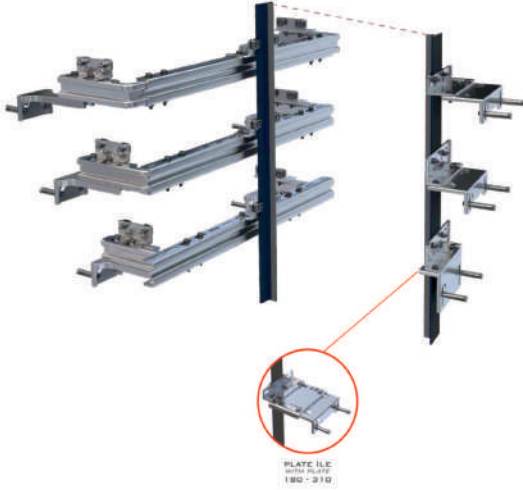
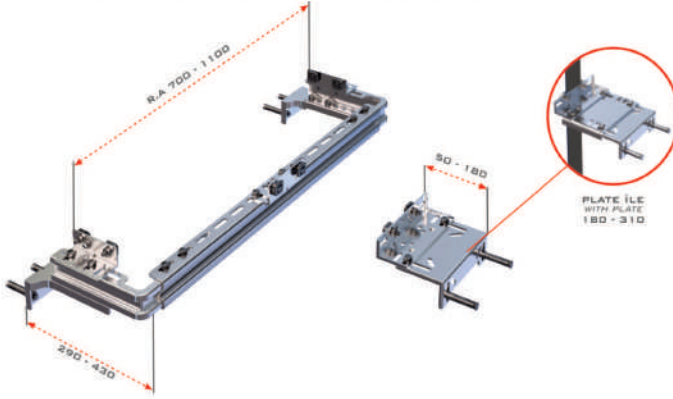


AHTAPOT ARKA AĞIRLIK SİSTEMİ 1 / AHP-03-F
OCTOPUS COUNTER WEIGHT BRACKET SYSTEM 1

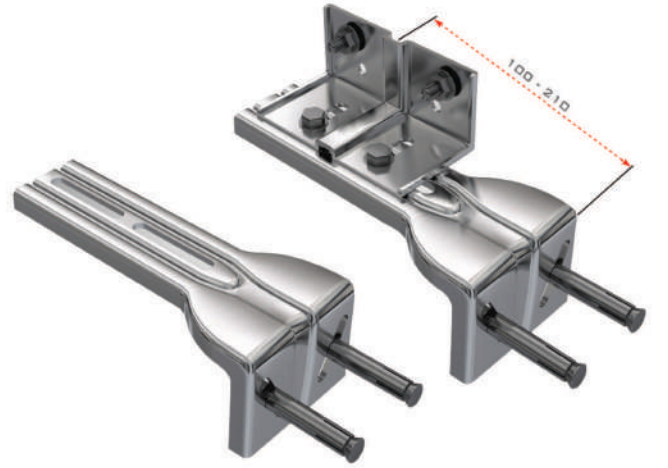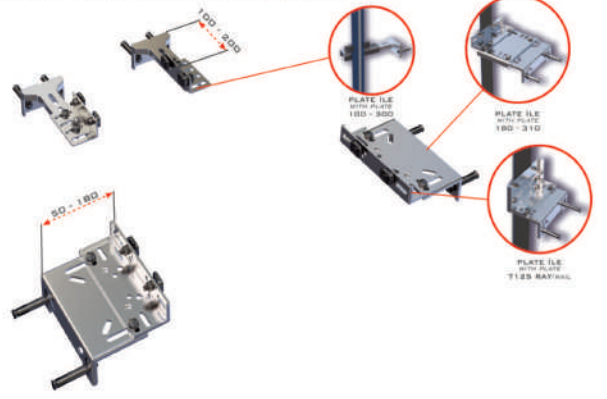


Asansör Ekipmanı

Elevator Equipments | معدات المصاعد



Asansör Ekipmanı


Elevator Equipments | معدات المصاعد





CENTRALINA 90/M Conforme alle EN81

*Hidrolik Ünite 90/M
In accordance with
EN81*

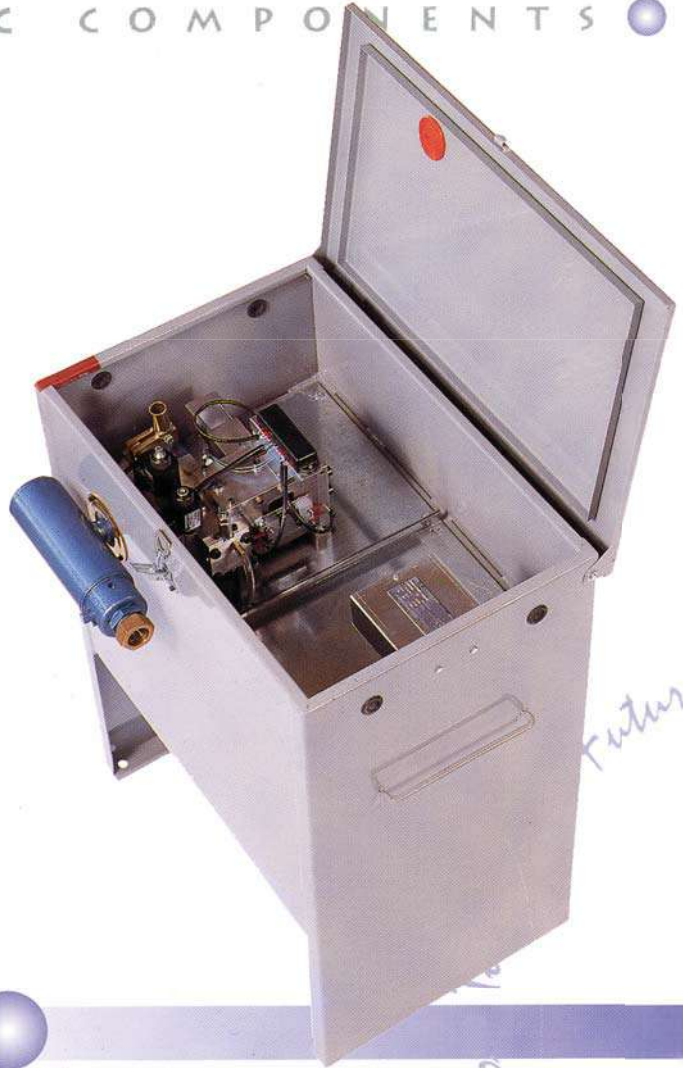

CENTRALINE

PUMP

UNITS

GRUPPI

VALVOLE

VALVES

GROUP

Motorlu tip çalışan hidrolik ünite grubuna aittir.

Valflerin montajı hidrolik ünitenin içinde yapılmıştır.

Hız geçişleri küçük bir tahrik motoru ile yapılmaktadır.

Sessiz ve sarsıntısız çalışma, yağ sıcaklığı değiştiğinde dahi hız geçişleri istikrarını koruyamaya elverişlidir.

They belong to the group of "Motorized" Pump Units.

The valves assembly is mounted inside the tank.

Speed passages are obtained by means of a small gearmotor.

They are suitable when are requested very silent working and also stability of the passages when oil temperature changes.

İşlevsel Özellikleri:

- Yüke bağlı olmaksızın sessiz ve sarsıntısız aşamalı olarak çalışır.
- Kata yaklaşma hız hassasiyeti ayar imkanı sağlamaktadır.
- Hızlandırma ve durdurma işlemleri aşamalı olup sarsıntısızdır.
- Katta duruş hassasiyeti ayar imkanı sağlamaktadır.
- Yukarıda belirtilen tüm özellikler yukarı doğru ve aşağı doğru hareketlerin her ikisi için geçerlidir.
- Elle ve otomatik olarak acil durum kurtarma sistemlidir.
- Çalışma basıncı 10 ila 45 bar arasındadır.

Functioning Features :

- Progressive starting without jerks not depending upon the load.
- Adjustable floor approaching speed.
- Acceleration and braking are progressive and without jerks.
- Floor stop accuracy.
- All the above mentioned features are valid both in upward and downward movements.
- Manual and automatic emergency.
- Working pressure from 10 to 45 BAR.

VALF GRUBU

- 90/M
- VALVES GROUP





PISTONI

Conformi alle EN81

Piston

In accordance with
EN81

Özel tezgahlarda itinalı olarak
honlanmış borulu

Darbe vuruş emici özellikli üst başlık

Ayarlanabilir koruma valfi : 360°
cevrilebilir.

Kapatma takımı : toz ispatula halkası,
sürekli deformasyona karşı dirençli nitrilik
elastomer keçe , düşük statik ve dinamik
sürtünme katsayısına sahip rot kızığı.

Farklı adetler şeklinde tedarik edildiğinde
kolay ve kesin montaj olanakları.

Opsiyonel olarak kimyasal ve elektrolitik
aşınmaya karşı koruma.

Dar alanlarda kurulum kolaylığı.

Accurate finishing of the Ram.

Upper over-stroke shock absorber

Adjustable protection valve 360° swinging.

Sealing set including: dust scraper ring,
nitrilic elastomers seal which is
permanent-deformation resisting, rod
slide with low static and dynamic
friction coefficient.


Easy and precise mounting
when supplied in different
pieces.

Upon request
protection against
chemical and
electrolytical corrosion.




• CENTRAL DIRECT
EXECUTION

• INDIRECT AND DIRECT
SIDE EXECUTION

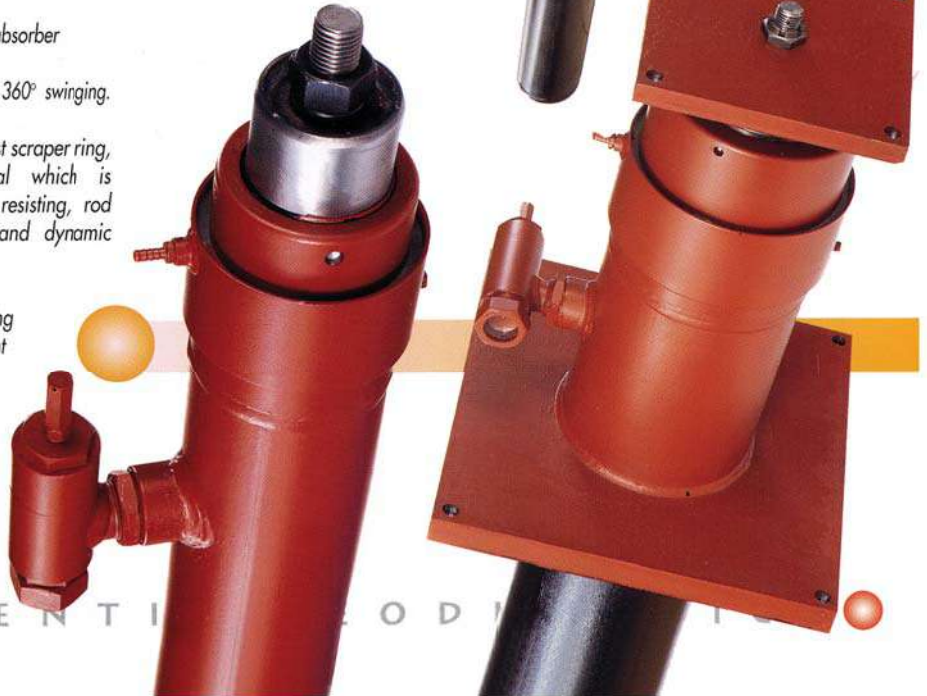


PISTONI


PISTONS

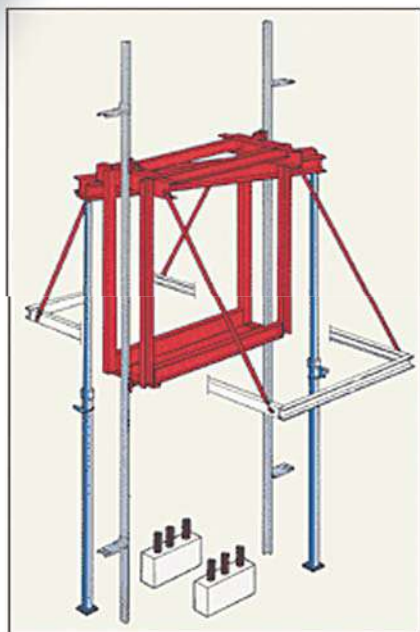


Tandem Karkas

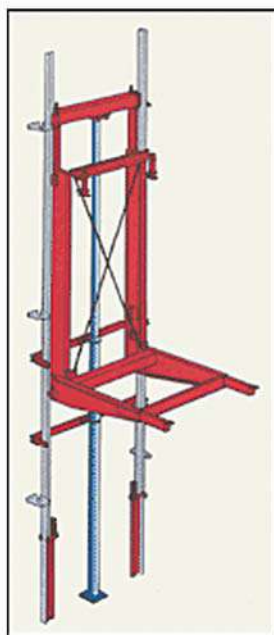


1:1 L Karkas

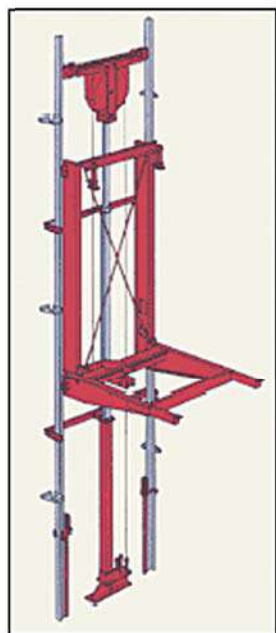

1:2 L Karkas

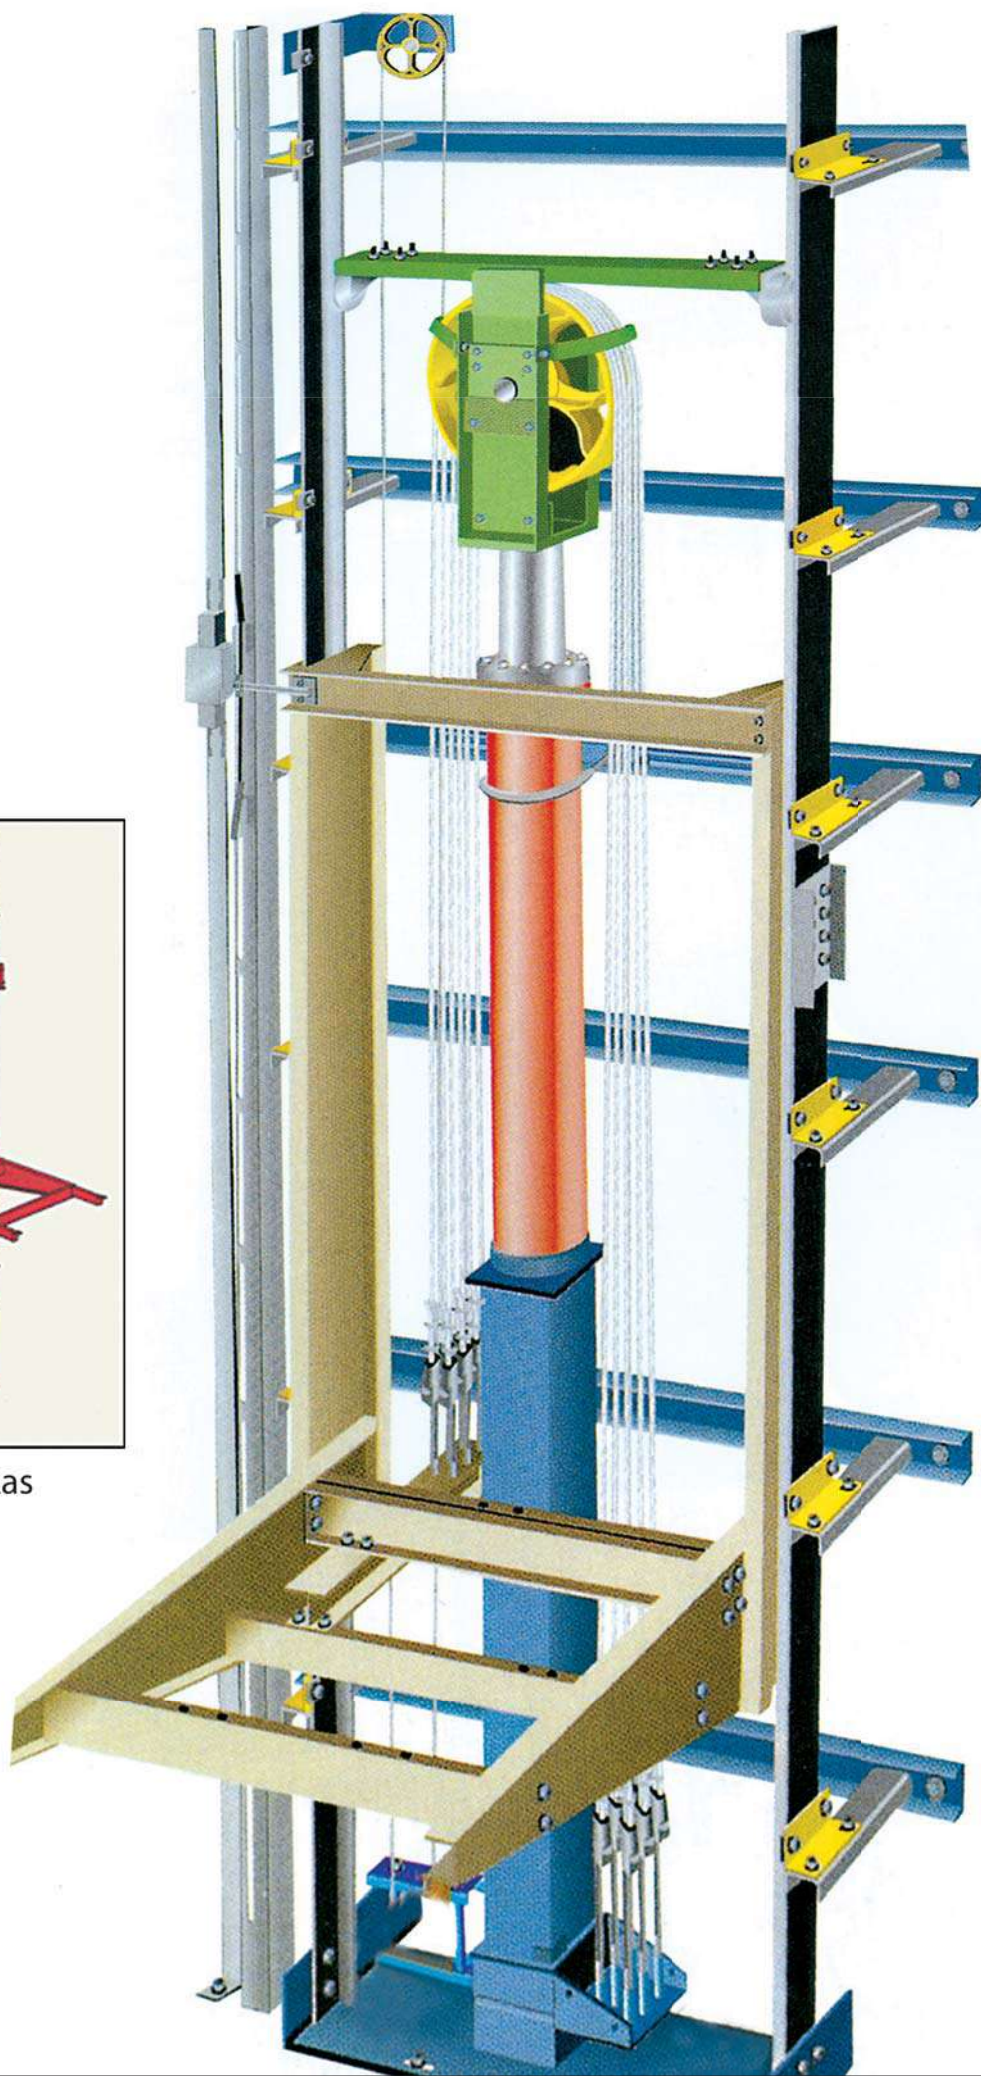



KAPALI TİP ENGELLİ PLATFORMU

CLOSED TYPE
DISABLED PLATFORM

- ▶ HYD-VK
 - ▶ HYD-BK
- 

6 metre ve üzeri bir seyir uzunluğu ile çalışan sonsuz
vidalı engelli asansörü yelpazesi söz konusu olduğunda

ÜRÜNLERİMİZ BENZERSİZDİR...





Daha iyi bir yaşam için
buluşma noktası...
meeting point
for a better life...

HYD-VK

Sonsuz Vida Milli Tahrik
Screw Nut System




 400 Kg Max. Capacity	 Maksimum Number of stops 5	 No machine room	 Emergency rescue Ups / Battery	 Do not require a pit	 1100x1400 mm (W x D) Platform size	 1600x1600 mm (W x D) Tower dimensions	 Door Size Full Auto 900x2000 mm (WxH)
 0,15m/sn. Max. Speed	 110 / 230 V 50-60 Hz	 Engine 2.2 kW	 Screwed drive type	 30.000 mm Max. Travel	 Soundless	 3 Language Voice Announcements	




Asansör kuyusu ve ruhsat gerektirmeyen, tekerlekli sandalye ile de kullanabileceğiniz HYD-VK Avrupa standartlarına tam olarak uygun olup Udem Adriatic tarafından onaylanmıştır. İç mekan veya dış mekanlarda güvenli kullanılır. Kullanım kolaylığı, pratik montajı ve asgari inşaat masrafı ile yapılarınız için uygundur. İthal kilit sistemi, geliştirilmiş kovan sistemi, bronzdan imal edilmiş somun, honlanmış özel sonsuz vida ile sessiz ve konforlu olan seyahati düşük bakım maliyeti ile sunar. 6 farklı standart ölçü ile üretildiği gibi istenildiğinde yapılarınızın fiziki durumlarına uygun özel ölçü ve özelliklerde üretilmektedir. Küçük bir ev aleti kadar enerji tüketen ürünlerimiz invertör sürüş sistemi ile yumuşak kalkış ve duruş konforu sunarken, evsel enerji tüketiminizi de düşürür.

Which does not require an elevator pit and does not require a license and can be used with a wheelchair, fully complies with European standards and has been approved by Udem Adriatic. It can be used safely indoors or outdoors. It is suitable for your buildings with its ease of use, practical assembly and minimum construction cost. It offers quiet and comfortable travel with its imported lock system, improved sleeve system, nut made of bronze, honed special endless screw, and has low maintenance costs. It is produced in 6 different standard sizes, as well as in special sizes and features suitable for the physical conditions of your buildings when its requested. Our products, which consume as much energy as a small household appliance, offer soft starting and stopping comfort with the inverter driving system. It also reduces your domestic house energy consumption.

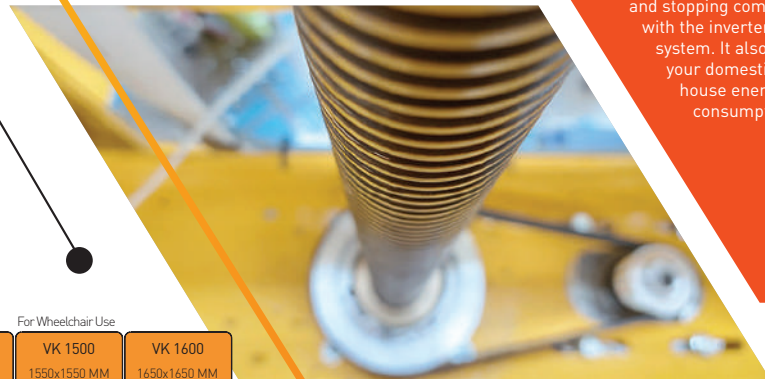

	For Seat Use			For Wheelchair Use		
SINGLE ENTRY	VK 1100	VK 1200	VK 1300	VK 1400	VK 1500	VK 1600
Structural Opening	1150x1150 MM	1250x1250 MM	1350x1350 MM	1450x1450 MM	1550x1550 MM	1650x1650 MM
Tower Dimensions	1100x1100 MM	1200x1200 MM	1300x1300 MM	1400x1400 MM	1500x1500 MM	1600x1600 MM
Platform Size	600x900 MM	700x1000 MM	800x1100 MM	900x1200 MM	1000x1300 MM	1100x1400 MM
Door Opening (WxH)	600x2000 MM	700x2000 MM	800x2000 MM	900x2000 MM	1000x2000 MM	900x2000 MM
OPPOSING ENTRY						
Structural Opening	1150x1150 MM	1250x1250 MM	1350x1350 MM	1450x1450 MM	1550x1550 MM	1650x1650 MM
Tower Dimensions	1100x1100 MM	1200x1200 MM	1300x1300 MM	1400x1400 MM	1500x1500 MM	1600x1600 MM
Platform Size	600x900 MM	700x1000 MM	800x1100 MM	900x1200 MM	1000x1300 MM	1100x1400 MM
Door Opening (WxH)	400x2000 MM	500x2000 MM	600x2000 MM	700x2000 MM	800x2000 MM	900x2000 MM
DIAGONAL ENTRY						
Structural Opening	1150x1150 MM	1250x1250 MM	1350x1350 MM	1450x1450 MM	1550x1550 MM	1650x1650 MM
Tower Dimensions	1100x1100 MM	1200x1200 MM	1300x1300 MM	1400x1400 MM	1500x1500 MM	1600x1600 MM
Platform Size	600x900 MM	700x1000 MM	800x1100 MM	900x1200 MM	1000x1300 MM	1100x1400 MM
Door Opening (WxH)	400-600x2000 MM	500-700x2000 MM	600-800x2000 MM	700-900x2000 MM	800-900x2000 MM	900x2000 MM
GENERAL DIMENSION	1 Person	2 Person	3 Person	4 Person	5 Person	5 Person
Load Capacity Max	400 KG	400 KG	400 KG	400 KG	425 KG	500 KG
Headroom	2350 MM	2350 MM	2350 MM	2350 MM	2350 MM	2350 MM
Pit Height	120 MM	120 MM	120 MM	120 MM	120 MM	120 MM

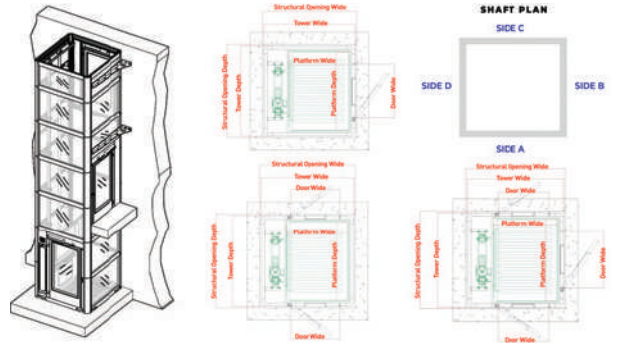

ÇEVRE ŞEHİRCİLİK VE İKLİM DEĞİŞİKLİĞİ BAKANLIĞI

35.735.1101-1102-1103-1104 POZLARINA UYGUNDUR.

HYD-BK

Hidrolik Tahrikli Sistem
Hydraulic System



 500 Kg Max. Capacity	 Maksimum Number of stops 5	 No machine room	 Emergency rescue Ups / Battery	 Do not require a pit	 1100x1400 mm (W x D) Platform size	 1600x1600 mm (W x D) Tower dimensions	 Door Size Full Auto 900x2000 mm (WxH)
 0,15m/sn. Max. Speed	 110 / 230 V 50-60 Hz 1/3 Phase	 Engine 2.9 kW	 Hydraulic drive type	 14.000 mm Max. Travel	 Soundless	 3 Language Voice Announcements	



TS EN 81-41: 2010 Avrupa standartları ve A3 direktiflerine uygun hidrolik tahrik ve semer tip hidrolik engelli asansörleri kuyu dibi, ruhsat ve asansör kuyusu gerektirmez. Halat kopmalarına karşı mekanik fren sistemi, hortum patlatma valfi, debi sınırlama valfi, gevşek halat valfi, küresel vana, el pompası, manüel el ile kurtarma sistemi ve manometre gibi bir çok özellik ile donatılmıştır. Çift hızlı yumuşak kalkış ve duruş özelliğine sahip Alman menşei KV1S valf takımı, hidrolik ünitelerin vazgeçilmez bileşeni ultra sessiz İtalyan menşei Settima vidalı pompalar ve yağın içerisinde dönen SB dalma motor ile dizayn edilir.

Hydraulic drive and saddle type hydraulic disabled lifts in accordance with European standards and A3 directives.

It does not require a pit, license and elevator space. It is equipped with many features such as mechanical brake system against rope breakage, hose burst valve, flow limiting valve, slack rope valve, ball valve, hand pump, manual hand rescue system and manometer.


German origin KV1S valve set with double speed soft start and stop feature, Ultra-quiet Italian origin Settima screw pumps, the indispensable component of hydraulic units, and it is designed with SB submersible motor rotating in oil.




SINGLE ENTRY	For Seat Use			For Wheelchair Use		
	BK 1100	BK 1200	BK 1300	BK 1400	BK 1500	BK 1600
Structural Opening	1150x1150 MM	1250x1250 MM	1350x1350 MM	1450x1450 MM	1550x1550 MM	1650x1650 MM
Tower Dimensions	1100x1100 MM	1200x1200 MM	1300x1300 MM	1400x1400 MM	1500x1500 MM	1600x1600 MM
Platform Size	600x900 MM	700x1000 MM	800x1100 MM	900x1200 MM	1000x1300 MM	1100x1400 MM
Door Opening (WxH)	600x2000 MM	700x2000 MM	800x2000 MM	900x2000 MM	1000x2000 MM	1100x2000 MM
OPPOSING ENTRY						
Structural Opening	1150x1150 MM	1250x1250 MM	1350x1350 MM	1450x1450 MM	1550x1550 MM	1650x1650 MM
Tower Dimensions	1100x1100 MM	1200x1200 MM	1300x1300 MM	1400x1400 MM	1500x1500 MM	1600x1600 MM
Platform Size	600x900 MM	700x1000 MM	800x1100 MM	900x1200 MM	1000x1300 MM	1100x1400 MM
Door Opening (WxH)	400x2000 MM	500x2000 MM	600x2000 MM	700x2000 MM	800x2000 MM	900x2000 MM
DIAGONAL ENTRY						
Structural Opening	1150x1150 MM	1250x1250 MM	1350x1350 MM	1450x1450 MM	1550x1550 MM	1650x1650 MM
Tower Dimensions	1100x1100 MM	1200x1200 MM	1300x1300 MM	1400x1400 MM	1500x1500 MM	1600x1600 MM
Platform Size	600x900 MM	700x1000 MM	800x1100 MM	900x1200 MM	1000x1300 MM	1100x1400 MM
Door Opening (WxH)	400-600x2000 MM	500-700x2000 MM	600-800x2000 MM	700-900x2000 MM	800-900x2000 MM	900x2000 MM
GENERAL DIMENSION						
	1 Person	2 Person	3 Person	4 Person	5 Person	5 Person
Load Capacity Max	400 KG	400 KG	400 KG	400 KG	425 KG	500 KG
Headroom	2350 MM	2350 MM	2350 MM	2350 MM	2350 MM	2350 MM
Pit Height	120 MM	120 MM	120 MM	120 MM	120 MM	120 MM

ÇEVRE ŞEHİRCİLİK VE İKLİM DEĞİŞİKLİĞİ BAKANLIĞI

35.735.1201-1202-1203-1204 POZLARINA UYGUNDUR.

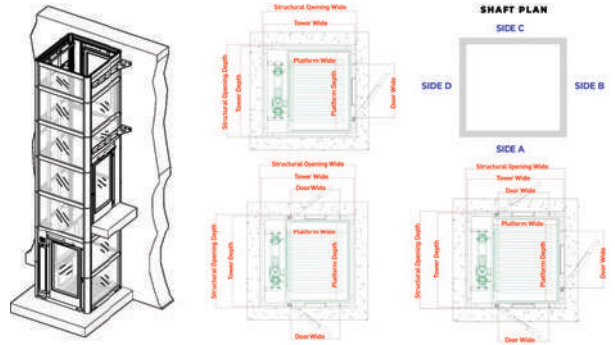

TS EN 81-41



AÇIK TİP ENGELLİ PLATFORMU

OPEN TYPE
DISABLED PLATFORM

- ▶ HYD-V
 - ▶ CORE
- 

GÜVENİLİR MÜHENDİSLİK...

RELIABLE ENGINEERING...





Kapalı yerde kalma
korkusuna son...

End your
Claustrophobia...

HYD-V

Sonsuz Vida Milli Tahrik
Screw Nut System







 250 Kg Max. Capacity	 Maksimum Travel 3.000 mm	 No machine room	 Emergency rescue Ups / Battery	 Do not require a pit	 850x1200 mm (W x D) Platform size	 1300x1330 mm (W x D) Tower dimensions	 Door Size Full Auto 900x1100 mm (WxH)
 0,15m/sn. Max. Speed	 110 / 230 V 50-60 Hz 1/3 Phase	 Engine 0.75 kW	 Screwed/Hydraulic Drive Type	 +50° / -35°	 Optional bellows	 3 Language Voice Announcements	  



Kapalı yerde kalma korkunuz günlük yaşamınızı etkiliyor mu? Bütçenize uygun, yer avantajı sağlayan, konforlu ve güvenli olduğu kadar görünüşüyle dikkat çeken HYD-V, kısa mesafeler için avantajlı çözümdür. Paslanmaz çelik kaplaması, estetik dizaynı ve duruşlarda optimum konforu ile kullanıcılarının yaşam kalitesini artırır. Otomatik açılıp kapanan krom kapı ve platform altı körük sistemi sizlere her zaman güvenilir seyahat sunar.

Does staying indoors affect you horrible daily life? The HYD-V is an attractive solution for short distances as it is as comfortable and safe as it is affordable for your budget. Stainless steel coating aesthetic design and optimum comfort during stoppages to enhance the quality of life of the users. Automatic opening and closing of the chrome doors and under-platform bellows system provides you with reliable travel all the time.

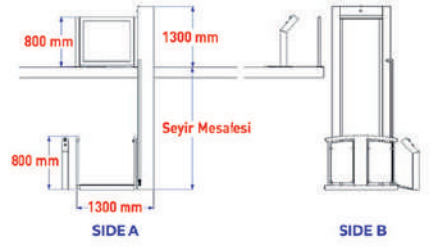




TS EN 81-41

CORE

Sonsuz Vida Milli Tahrik
Screw Nut System




 385 Kg Max. Capacity	 Optional bellows	 No machine room	 Emergency rescue Ups / Battery	 Do not require a pit	 940x1250 mm (W x D) Platform size	 1415x1380 mm (W x D) Tower dimension	 Door size full auto 900x1100 mm (WxH)
 0,15m/sn. Max. Speed	 110 / 230 V 50-60 Hz	 Engine 2.2 kW	 Screwed drive type	 3.000 mm Max. Travel	 +50° / -35°	 3 Language Voice Announcements	

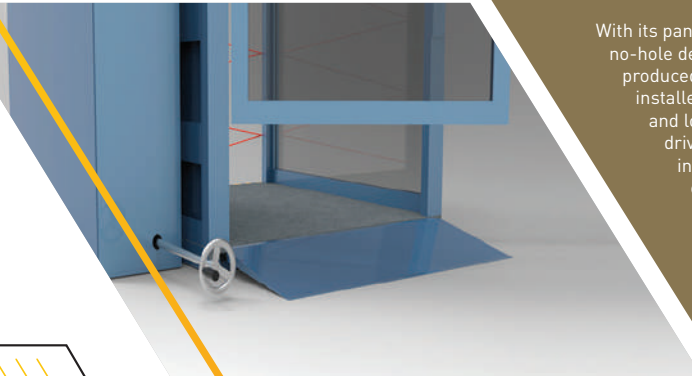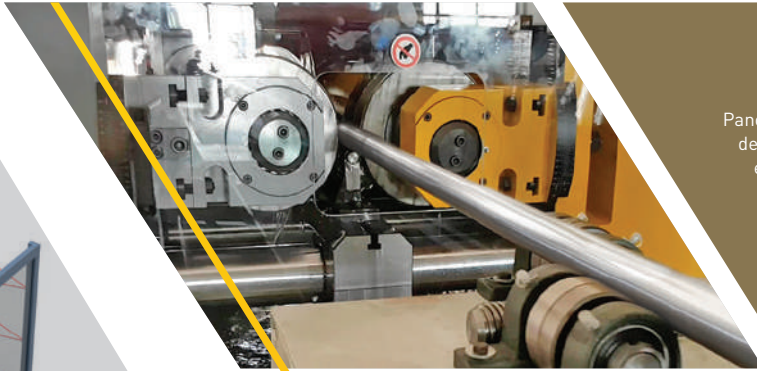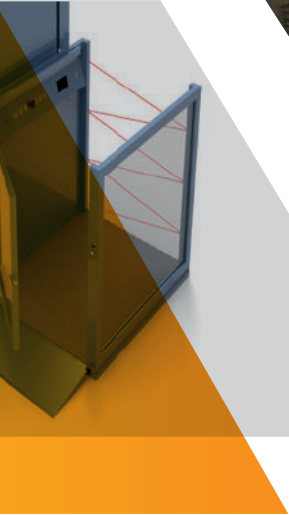

Panoramik görünümü, modüler yapısı, kuyusuz dizaynı ve farklı ölçüler de üretilebilen esnek tasarımı ile en küçük alanlara kolayca monte edilir. İç mekan ve dış mekanlarda rahatlıkla kullanılabileceğiniz CORE, Vvuf sürüş sistemi ve makine parkurumuzda üretilen güvenli sonsuz vida teknolojisi ile sessiz ve uzun ömürlüdür. Tekerlekli sandalye kullanımına uygun olan Core 7 segment display, aşırı yük, alarm, interkom ve 3 dil anons sistemi ile sunulur. Pusetli küçük çocuklu aileler, hasta yaşlı veya yürüme zorluğu çeken bireyler için platform üzerinde bulunan manüel veya otomatik kapı ve ışın perdesi, ekstra güvenlik sağlar.


With its panoramic view, modular structure, no-hole design and flexible design that can be produced in different sizes, it can be easily installed in the smallest areas. It is quiet and long-lasting with the CORE Vvuf driving system, which you can easily use indoors and outdoors, and the safe endless screw technology produced in our machine park. Suitable for wheelchair use, Core 7 segment display is offered with overload, alarm, intercom and 3-language announcement system. Manual or automatic door and ray curtain on the platform provide extra security for families with small children with strollers, sick elderly or individuals with walking difficulties.

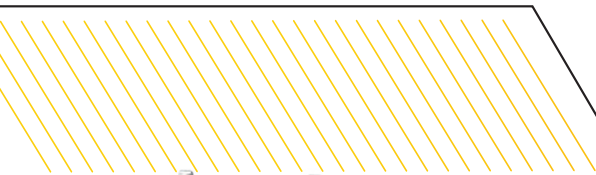

For Seat Use

For Wheelchair Use

SINGLE ENTRY	CORE 700	CORE 800	CORE 900	CORE 1000	CORE 1100
Structural Opening	1265x1100 MM	1365x1200 MM	1465x1430 MM	1565x1430 MM	1665x1580 MM
Tower Dimensions	1215x1050 MM	1315x1150 MM	1415x1380 MM	1515x1380 MM	1615x1530 MM
Platform Size	740x920 MM	840x1020 MM	940x1250 MM	1040x1250 MM	1140x1400 MM
Door Opening (WxH)	700x1100 MM	800x1100 MM	900x1100 MM	1000x1100 MM	1100x1100 MM
OPPOSING ENTRY					
Structural Opening	1265x1100 MM	1365x1200 MM	1465x1430 MM	1565x1430 MM	1665x1580 MM
Tower Dimensions	1215x1050 MM	1315x1150 MM	1415x1380 MM	1515x1380 MM	1615x1530 MM
Platform Size	740x920 MM	840x1020 MM	940x1250 MM	1040x1250 MM	1140x1400 MM
Door Opening (WxH)	700x1100 MM	800x1100 MM	900x1100 MM	1000x1100 MM	1100x1100 MM
DIAGONAL ENTRY					
Structural Opening	1340x1100 MM	1440x1200 MM	1540x1430 MM	1640x1430 MM	1740x1580 MM
Tower Dimensions	1290x1050 MM	1390x1150 MM	1490x1380 MM	1590x1380 MM	1690x1530 MM
Platform Size	740x920 MM	840x1020 MM	940x1250 MM	1040x1250 MM	1140x1400 MM
Door Opening (WxH)	700x1100 MM	800x1100 MM	900x1100 MM	1000x1100 MM	1100x1100 MM
GENERAL DIMENSION					
	1 Person	2 Person	3 Person	4 Person	5 Person
Load Capacity Max	400 KG	400 KG	400 KG	400 KG	400 KG
Headroom	1500 MM	1500 MM	1500 MM	1500 MM	1500 MM
Pit Height	80 MM	80 MM	80 MM	80 MM	80 MM

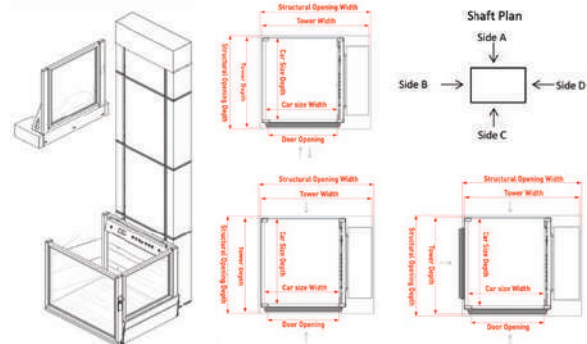

MAKASLI ENGELLİ PLATFORMU

Hydraulic Scissor Platform

- ▶ SÜRDÜRÜLEBİLİRLİĞE
- ▶ BAKIŞ AÇIMIZ

Gelişmiş Teknoloji ve Yenilikler Bir Arada...

Advanced Technology and Innovations Together...

90 cm hareket mesafesi ile
ekonomik ve sağlam...

With 90 cm travel distance
economical and robust...



HYD-MAK

Alanı verimli kullanır.

It makes efficient use of space.







 250 Kg Max. Capacity	 Maksimum Travel 900 mm	 No machine room	 Emergency rescue Ups / Battery	 Do not require a pit	 890x1220 mm (WxD) Platform size	 1080x1305 mm (WxD) Tower dimensions	 Door Size Full Auto 900x1100 mm (WxH)
 0,15m/sn. Max. Speed	 110 / 230 V 50-60 Hz 1/3 Phase	 Engine 0.75 kW	 Screwed/Hydraulic Drive Type	 +50° / -35°	 Optional bellows		




HYD-MAK scissor type disabled platform, AISI 304, which gives the building an aesthetic appearance with its compact, low-cost and stylish design that you can use safely indoors and outdoors. With its quality stainless chrome coating, it is not affected by humidity, rain, snow and humidity. Because it is hydraulic, it is quiet and long-lasting. Vibration absorbing components and improved bronze bearings offer high performance.



European Machinery Directive 2006/42/EC
European Standard EN 81-41

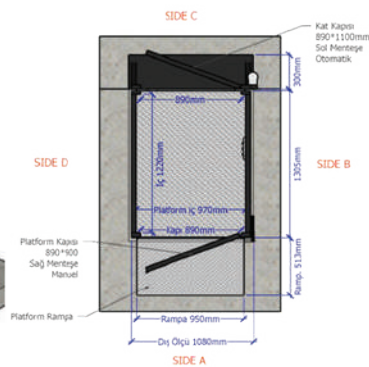



MERDİVEN ASANSÖRLERİ

STAIRLIFTS

- ▶ DORU
 - ▶ ALYA
- 

Gelişmiş Teknoloji ve Yenilikler Bir Arada...

Advanced Technology and Innovations Together...





Fiziksel engel, bizim için
asla engel değildir...

Physical disabilities are
never an obstacle for us...



Dönemeçli Merdivenler Curved Stairs








 300 Kg Max. Capacity	 50.000 mm Max. Travel	 Wifi	 Bluetooth	 Overspeed safety brake	 1050 x 650 mm Platform size	 Climbing angle 0° - 45°	 Indoor / Outdoor Ada PVAG
 0,07 / 0,15m/sn Max. Speed	 110/230 V 50-60 Hz	 Engine 540 watt	 Rack gear	 Platform 165 Kg Rail 12 Kg/m	 0° - 30° - 300 Kg 31° - 35° - 250 Kg 36° - 45° - 200 Kg	 3 Language Voice Announcements	



Kavisli merdivenler için geliştirilmiş dönüşlü merdiven asansörü Doru, raylar üzerinde bulunan benzersiz bir bakır bara enerji hattı ile 24 Vdc elektriğini raylar üzerinden alır ve trafiği çok olan uzun seyir mesafeleri için kesintisiz bir hizmet sağlar. Manüel el ile de açılıp kapatılabilen platformun her iki tarafındaki güvenlik bariyerleri ve rampaları asansörün hareketi sırasında kilitletir ve sadece asansör alt ve üst durak noktalarında iniş ve binişin yapılacağı taraf açılır. Wi-fi bağlantısı ile yazılımları güncellenebilen merdiven asansörlerimiz, Android ve ios uyumlu tablet veya akıllı telefonlar ile tüm ayar ve parametreleri telefon üzerinden kontrol edilebilir.

Doru, a turning / curved stairlift developed for curved stairs, receives 24 Vdc electricity from the rails with a unique copper bar power line on the rails and provides an uninterrupted service for long travel distances with heavy traffic. Safety barriers and ramps on both sides of the platform, which can be opened and closed manually, are locked during the movement of the elevator, and only at the lower and upper stops of the elevator, the side where the boarding and landing will take place is opened. Our stairlifts, whose software can be updated via Wi-Fi connection, can be controlled via Android and ios compatible tablets or smart phones, and all settings and parameters can be controlled over the phone.



ALYA


Düz Merdivenler Straight Stairs



 300 Kg Max. Capacity	 50.000 mm Max. Travel	 Wifi	 Bluetooth	 Overspeed safety brake	 1050 x 650 mm Platform size	 Climbing angle 0° - 45°	 Indoor / Outdoor Ada PVAG
 0,07 / 0,15m/sn Max. Speed	 110/230 V 50-60 Hz	 Engine 540 watt	 Rack gear	 Platform 165 Kg Rail 12 Kg/m	 0° 30° - 300 Kg 31° 35° - 250 Kg 36° 45° - 200 Kg	 3 Language Voice Announcements	




Dar merdiven yapıları için duvar askı aparatları ile duvara monte edilebilir ve minimum yer kaplar. Alüminyumdan imal edilen çift ray teknolojisi, 304 krom gramayer dişlisi ve akrilik kaplaması ile IP55 standartlarında üretilir. 10 metre ve altında çalışan akülü sistemlere kıyasla trafiği yoğun, uzun seyir mesafelerinde çalışabilmesi için enerjisini raylar üzerinden alır ve sizi asla yolda bırakmaz. Alt ve üst durak noktalarında bulunan ergonomik uzaktan kumandaları veya akıllı telefonlar üzerinden kontrol edilebilen katlanabilir merdiven asansörlerimiz, aşırı yük, aşırı hız, VSR akıllı ses asistanı ile birçok dil seçeneği ile tüm hareketlerini ve oluşan hataları sesli anons eder.

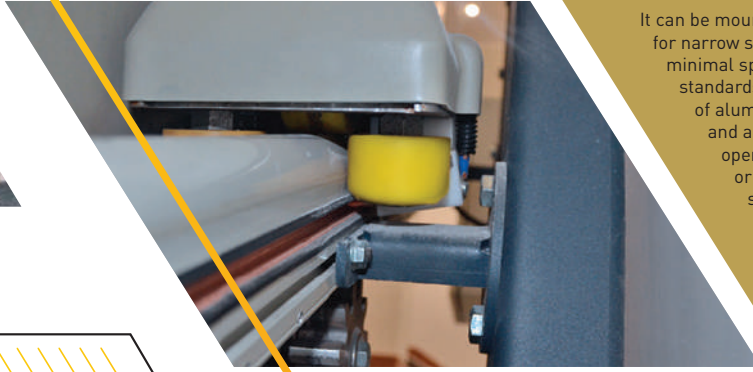

It can be mounted on the wall with wall hangers for narrow staircase structures and takes up minimal space. It is produced according to IP55 standards with double rail technology made of aluminum, 304 chrome grammar gear and acrylic coating Compared to battery-operated systems operating at 10 meters or less, it takes its energy from the rails so that it can operate at long cruising distances with heavy traffic and never leaves you on the road. Our foldable stairlifts, which can be controlled via ergonomic remote controls or smart phones at the lower and upper stops, Overload, overspeed, VSR smart voice assistant and many language options, it announces all movements and errors that occur.



CE
TS EN 81-40

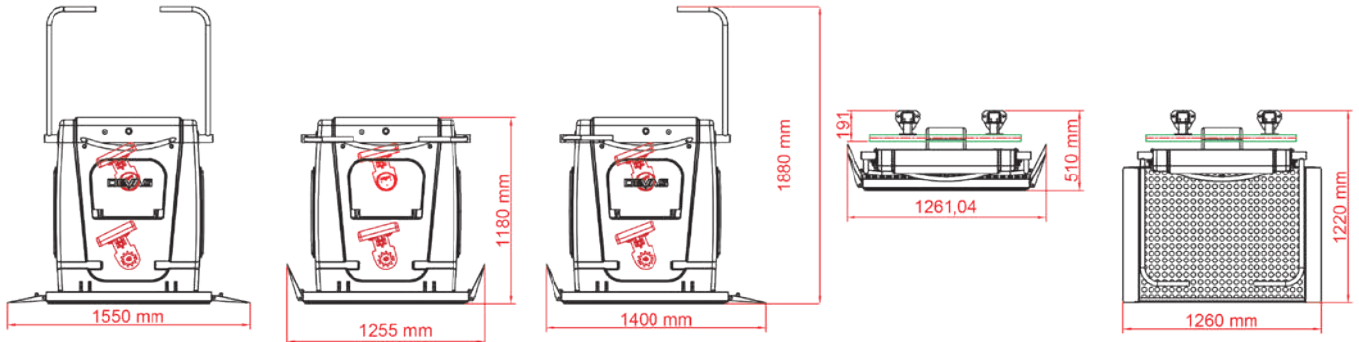

KOLTUK ASANSÖRÜ

Modern Tasarım
Freecurve Stairlift



Alliance Seat








Güvenliğinizden ödün vermeden uygun bir koltuklu dönüşlü merdiven asansörü çözümü arıyorsanız tam size göredir. Eklem rahatsızlığı olan, merdiven inme ve çıkma gibi aktivitelerde zorlanan kişiler için kullanımı kolaydır. Düz ve dönüşlü merdivenler için tasarlanan merdiven asansörü, her türlü ölçü ve konforu ile sizi istediğiniz kata taşır.


Designed for flat ladder, it has all the necessary dimensions for people who have difficulty in activities such as stairlift uphill and stair climbing.



CE
EN 81-40

Smart seat	Dimensions
A Minimum swivel radius - With armrest spacers - With extended armrest spacers	670mm 695mm 710mm
B Wall to inner seat back*	75mm
C Seat depth - With extended seat	360mm 425mm
D Minimum folded width to footplate*	385mm
E Minimum open width to edge footplate*	650mm
F Armrest width – external - With armrest spacers - With extended armrest spacers	550mm 590mm 635mm
G Armrest width – internal - With armrest spacers - With extended armrest spacers	460mm 515mm 560mm
H Seat back height	455mm
I Footplate to seat height - Standard seat option - Perch seat option**	465-540mm 675-875mm
J Minimum footplate height	85mm
Minimum track intrusion into staircase	115mm
Maximum weight limit - Standard version - Heavy duty version (XL)*** - Extra heavy duty version (XXL)***	137kg 160kg 200kg





HOMELIFT

- ▶ İvertör
 - ▶ Soft start
 - ▶ Işın perdesi
 - ▶ Oto kurtarma
- 

Yeni nesil asansör sistemleri...

New generation elevator systems.....





Sonsuz vidalı kabinli
ev tipi asansör sistemleri...

Safety and comfort
for your life...

GL-400

Hayatınızı kolaylaştırır.

It makes your life easier.




 400 Kg Max. Capacity	 Maksimum Number of stops 5	 No machine room	 Emergency rescue Ups / Battery	 Do not require a pit	 1100*1350 mm (W x D) Cabin size	 1600x1600 mm (W x D) Tower Dimensions	 Telescopic Swing Door
 0,15m/sn. Max. Speed	 110 / 230 V 50-60 Hz 1/3 Phase	 Engine 2.2 kW	 Screwed Hydraulic Drive Type	 Soundless	 +50° / -35°	 3 Language Voice Announcements	




Merdiven çıkmakta zorlanıyor ve evinizde nasıl kalabileceğinizi mi düşünüyorsunuz? Günleriniz çocuklarla ve alışveriş çantalarıyla dolu ellerinizle merdivenlerden inip çıkmak ile mi geçiyor? Yoksa sadece daha fazla konfor ve rahatlık mı arıyorsunuz? Farklı erişilebilirlik, konfor ve alan gereksinimleri için oluşturulmuş bir dizi ev asansörümüz var. Hepsini size iyi düşünülmüş bir ergonomi sunar ve her zaman için rahat etmesi için Akıllı Güvenlik sistemlerimizle donatılmıştır. DEVAS, eviniz için altı farklı ölçüde ev asansörü üretmektedir: 1100 mm' den 1600 mm'e kadar DEVAS HOMELIFT GL-400 modellerimize göz atın ve hangi modelin ve hangi ölçünün ihtiyaçlarınıza en uygun olduğunu öğrenin!



Having trouble climbing stairs and wondering how to stay at home? Do you spend your days walking up and down stairs with kids and hands full of shopping bags? Or are you just looking for more comfort and convenience? We have a range of home lifts created for different accessibility, comfort and space requirements. All offer well thought-out ergonomics and are equipped with our Smart Safety systems for your peace of mind at all times. DEVAS manufactures six different sizes of home elevators for your home: Take a look at our DEVAS HOMELIFT GL-400 Models from 1100 mm to 1600 mm and find out which model and which size best suits your needs!

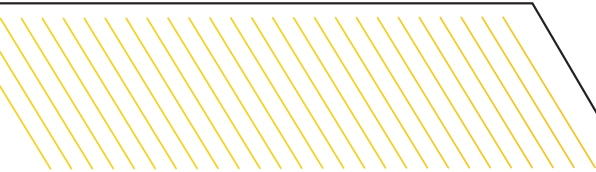

	For Seat Use			For Wheelchair Use		
SINGLE ENTRY	GL 1100	GL 1200	GL 1300	GL 1400	GL 1500	GL 1600
Structural Opening	1150x1150 MM	1250x1250 MM	1350x1350 MM	1450x1450 MM	1550x1550 MM	1650x1650 MM
Tower Dimensions	1100x1100 MM	1200x1200 MM	1300x1300 MM	1400x1400 MM	1500x1500 MM	1600x1600 MM
Cabin Size (DxW)	600x850 MM	700x950 MM	800x1050 MM	900x1150 MM	1000x1250 MM	1100x1350 MM
Door Opening (WxH)	600x2000 MM	700x2000 MM	800x2000 MM	900x2000 MM	1000x2000 MM	1100x2000 MM
OPPOSING ENTRY						
Structural Opening	1150x1150 MM	1250x1250 MM	1350x1350 MM	1450x1450 MM	1550x1550 MM	1650x1650 MM
Tower Dimensions	1100x1100 MM	1200x1200 MM	1300x1300 MM	1400x1400 MM	1500x1500 MM	1600x1600 MM
Cabin Size (DxW)	600x850 MM	700x950 MM	800x1050 MM	900x1150 MM	1000x1250 MM	1100x1350 MM
Door Opening (WxH)	600x2000 MM	700x2000 MM	800x2000 MM	900x2000 MM	1000x2000 MM	1100x2000 MM
DIAGONAL ENTRY						
Structural Opening	1150x1150 MM	1250x1250 MM	1350x1350 MM	1450x1450 MM	1550x1550 MM	1650x1650 MM
Tower Dimensions	1100x1100 MM	1200x1200 MM	1300x1300 MM	1400x1400 MM	1500x1500 MM	1600x1600 MM
Cabin Size (DxW)	600x850 MM	700x950 MM	800x1050 MM	900x1150 MM	1000x1250 MM	1100x1350 MM
Door Opening (WxH)	600x2000 MM	700x2000 MM	800x2000 MM	900x2000 MM	1000x2000 MM	1100x2000 MM
GENERAL DIMENSION	1 Person	2 Person	3 Person	4 Person	5 Person	5 Person
Load Capacity Max	400 KG	400 KG	400 KG	400 KG	425 KG	500 KG
Headroom	2350 MM	2350 MM	2350 MM	2350 MM	2350 MM	2350 MM
Pit Height	250 MM	250 MM	250 MM	250 MM	250 MM	250 MM

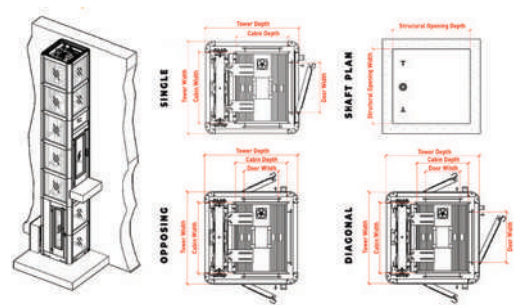

tubeLift

Işığınız hiç kesilmesin...

Your light
never be cut off...

 400 Kg Max. Capacity	 Maksimum Number of stops 7	 No machine room	 Emergency rescue Ups / Battery	 Do not require a pit	 650x2100 mm Cabin diameter	 900 mm Tower diameter	 Door Size 500x2100 mm (WxH)
 0,15m/sn. Max. Speed	 110 / 230 V 50-60 Hz 1/3 Phase	 Engine 2.2 kW	 Drum motor drive	 28.000 mm Max. Travel	 Overspeed safety brake	 3 Language Voice Announcements	



Farklı boyutlarda, taşıma kapasitelerinde ve renk kombinasyonlarında ev tipi asansörler sunuyoruz. Muhtemelen evinizdeki en ikonik parçalardan biri olacak olan TUBELIFT dekorasyonunuza uyum sağlar. Şeffaf yapısı sayesinde size manzaranın keyfini çıkarmak kalır. Göz alıcı ama göze batmayan ev asansörü çözümlerimizden TUBELIFT, dekoratif krom kaplama, polyester boya, MDF veya antibakteriyel pvc taban gibi özelleştirilebilir seçenekler ve bir çok aksesuar sunar. Yaşam alanınızın ortasına veya pencerelerin yanına monte edilsin gün ışığınız asla kesilmez. Geleneksel asansörlerin uygulanmadığı alanlarınıza, benzersiz bir sürüş sistemi ile gece gündüz konfor ve güven içerisinde kullanabilirsiniz.

We offer home elevators in different sizes, carrying capacities and color combinations.

TUBELIFT, which will probably be one of the most iconic pieces in your home, adapts to your decoration. With the transparent structure, all you have to do is enjoying the view.

TUBELIFT, one of our eye-catching but unobtrusive home elevator solutions, offers customizable options such as decorative chrome plating, polyester paint, MDF or antibacterial PVC base, and many accessories.

Whether installed in the middle of your living space or near windows, your daylight will never be interrupted.


You can use it in your areas where traditional elevators cannot be applied, with a unique driving system, day and night, in comfort and confidence.



For Seat Use

For Wheelchair Use

SINGLE ENTRY	TUBE 900	TUBE 1100	TUBE 1300	TUBE 1500	TUBE 1700
Structural Opening	950 MM	1150 MM	1350 MM	1550 MM	1750 MM
Tower Diameter	900 MM	1100 MM	1300 MM	1500 MM	1700 MM
Cabin Diameter (Ø)	650x2100 MM	850x2100 MM	1050x2100 MM	1250x2100 MM	1450x2100 MM
Door Opening	500x2100 MM	500x2100 MM	650x2100 MM	800x2100 MM	950x2100 MM
OPPOSING ENTRY					
Structural Opening	950 MM	1150 MM	1350 MM	1550 MM	1750 MM
Tower Diameter	900 MM	1100 MM	1300 MM	1500 MM	1700 MM
Cabin Diameter (Ø)	650x2100 MM	850x2100 MM	1050x2100 MM	1250x2100 MM	1450x2100 MM
Door Opening	500x2100 MM	500x2100 MM	650x2100 MM	800x2100 MM	950x2100 MM
DIAGONAL ENTRY					
Structural Opening	950 MM	1150 MM	1350 MM	1550 MM	1750 MM
Tower Diameter	900 MM	1100 MM	1300 MM	1500 MM	1700 MM
Cabin Diameter (Ø)	650x2100 MM	850x2100 MM	1050x2100 MM	1250x2100 MM	1450x2100 MM
Door Opening	500x2100 MM	500x2100 MM	650x2100 MM	800x2100 MM	950x2100 MM
GENERAL DIMENSION	1 Person	2 Person	3 Person	4 Person	5 Person
Load Capacity Max	400 KG	400 KG	400 KG	425 KG	500 KG
Headroom	2900 MM	2900 MM	2900 MM	2900 MM	2900 MM
Pit Height	100 MM	100 MM	100 MM	100 MM	100 MM

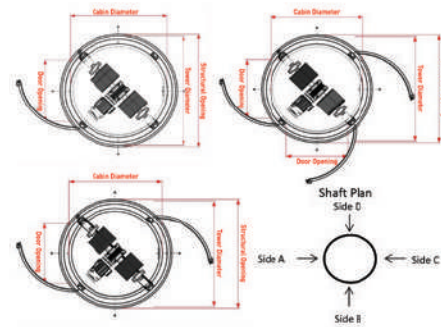

OCTOLIFT

Görüşünüzü engellemez.

Your view
will never be blocked.



 400 Kg Max. Capacity	 Maksimum Number of stops 7	 No machine room	 Emergency rescue Ups / Battery	 Do not require a pit	 950x950x2100 mm (W x D) Cabin size	 1200x1200 mm (W x D) Tower outer size	 Door Size 790x2100 mm (WxH)
 0,15m/sn. Max. Speed	 110 / 230 V 50-60 Hz 1/3 Phase	 Engine 2.2 kW	 Drum motor drive	 28.000 mm Max. Travel	 Overspeed safety brake	 3 Language Voice Announcements	



Büyük inşaat işleri gereksinimi olmaksızın, yeni ve mevcut binalara entegre edilmesi kolay, her şey dahil bir asansör konseptidir. Ayrıca zamansız tasarımı, geniş renk ve malzeme seçeneklerimiz sayesinde çoğu mimari stilde kusursuz bir şekilde uyum sağlar. Beş farklı standart ölçü ve sonsuz renk seçeneği ile imal edilebildiği gibi, mimari yapınıza uyacak şekilde farklı ölçü ve kaplama seçenekleri ile de üretilebilir. Sekizgen yapısı, manüel veya otomatik kapıları ve tekerlekli sandalye ile de kullanılabileceğiniz OCTALIFT kompakt tasarımı ile en küçük asansör modelidir.


without the need for major construction works, easy to integrate into new and existing buildings, It is an all-inclusive elevator concept. Plus, its timeless design blends seamlessly with most architectural styles, thanks to our wide selection of colors and materials. It can be manufactured with five different standard sizes and endless color options, as well as with different size and coating options to suit your architectural structure. OCTALIFT is the smallest elevator model with its octagonal structure, manual or automatic doors and compact design that you can use with a wheelchair.



For Seat Use

For Wheelchair Use

SINGLE ENTRY	OCTA 800	OCTA 1000	OCTA 1200	OCTA 1400	OCTA 1600
Structural Opening	850x850 MM	1050x1050 MM	1250x1250 MM	1450x1450 MM	1650x1650 MM
Tower Outer Size	800x800 MM	1000x1000 MM	1200x1200 MM	1400x1400 MM	1600x1600 MM
Cabin Size	550x550x2100 MM	750x750x2100 MM	950x950x2100 MM	1150x1150x2100 MM	1350x1350x2100 MM
Door Opening Size	420x2100 MM	620x2100 MM	790x2100 MM	930x2100 MM	1050x2100 MM
OPPOSING ENTRY					
Structural Opening	850x850 MM	1050x1050 MM	1250x1250 MM	1450x1450 MM	1650x1650 MM
Tower Outer Size	800x800 MM	1000x1000 MM	1200x1200 MM	1400x1400 MM	1600x1600 MM
Cabin Size	550x550x2100 MM	750x750x2100 MM	950x950x2100 MM	1150x1150x2100 MM	1350x1350x2100 MM
Door Opening Size	420x2100 MM	620x2100 MM	790x2100 MM	930x2100 MM	1050x2100 MM
DIAGONAL ENTRY					
Structural Opening	850x850 MM	1050x1050 MM	1250x1250 MM	1450x1450 MM	1650x1650 MM
Tower Outer Size	800x800 MM	1000x1000 MM	1200x1200 MM	1400x1400 MM	1600x1600 MM
Cabin Size	550x550x2100 MM	750x750x2100 MM	950x950x2100 MM	1150x1150x2100 MM	1350x1350x2100 MM
Door Opening Size	420x2100 MM	620x2100 MM	790x2100 MM	930x2100 MM	1050x2100 MM
GENERAL DIMENSION	1 Person	2 Person	3 Person	4 Person	5 Person
Load Capacity Max	400 KG	400 KG	400 KG	425 KG	500 KG
Headroom	2900 MM	2900 MM	2900 MM	2900 MM	2900 MM
Pit Height	100 MM	100 MM	100 MM	100 MM	100 MM

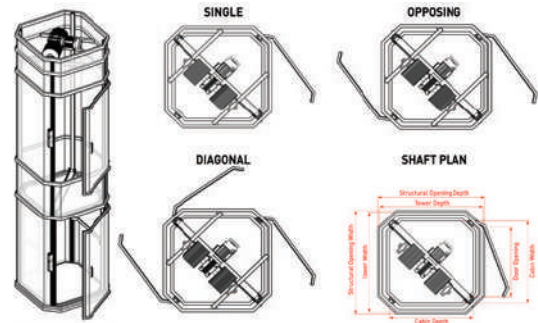

YEMEK ASANSÖRÜ

DUMBWAITER



İşinizi **kolaylaştırıyoruz...**
We make your work easier...





İnvertör sistemi ile hassas seviyeleme ve duruş.


 150 Kg Max. Capacity	 Maksimum Number of stops 6	 No machine room	 Emergency rescue Ups / Battery	 Do not require a pit	 1000x1000 mm (W x D) Car internal measurement	 1230x1130 mm (W x D) Towerouter size	 Cabin size 1000 X 1000 mm (WxH)
 0,30 m/sn. Max. Speed	 110 / 230 V 50-60 Hz 1/3 Phase	 Engine 0,55 kW	 With Counterweight	 +50° / -35°	 Soundless	 3 Language Voice Announcements	




Genellikle restoranlarda, otellerde, hastanelerde, kütüphanelerde, sanayi tesislerinde, ofis binalarında, villalarda ve çok katlı yemekhanesi olan büyük mutfaklarda kullanılabileceğiniz Garsoon yemek asansörü invertörlü ve karşı ağırlık sistemi sayesinde yemekleriniz dökülmeden katlar arası taşınmanızı sağlayacak en küçük boylu en büyük yardımcınız. İstenildiğinde kabinin içerisine tabak, bardak dosya ve küçük eşyalar konulacak raflar, gıda standartlarına uygun hijyenik materyallerden imal edilmektedir.

Garsoon food elevator, which can be used in restaurants, hotels, hospitals, libraries, industrial facilities, office buildings, villas and large kitchens with multi-storey dining halls, is the smallest and biggest assistant that will enable you to carry your food between floors without spilling, thanks to its inverter and counterweight system.

Shelves where plates, glasses, folders and small items can be placed in the cabinet when requested, its manufactured from hygienic materials in accordance with food standards.

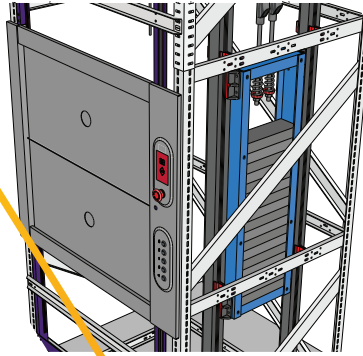

Technical Compliance
European Machinery Directive 2006/42/EC
European Standart EN 81-3

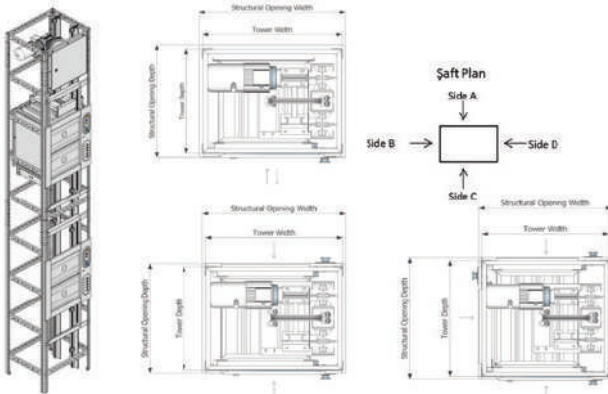

SINGLE ENTRY	GRS 400	GRS 500	GRS 600	GRS 800	GRS 1000
Structural Opening	650x550 MM	750x650 MM	850x750 MM	1050x950 MM	1250x1150 MM
Tower Outer Size	630x530 MM	730x630 MM	830x730 MM	1030x930 MM	1230x1130 MM
Cabin Size	400x400 MM	500x500 MM	600x600 MM	800x800 MM	1000x1000 MM
Door Opening Size	400x600 MM	500x800 MM	600x800 MM	800x800 MM	1000x1000 MM
OPPOSING ENTRY	GRS 400	GRS 500	GRS 600	GRS 800	GRS 1000
Structural Opening	650x550 MM	750x650 MM	850x750 MM	1050x950 MM	1250x1150 MM
Tower Outer Size	630x530 MM	730x630 MM	830x730 MM	1030x930 MM	1230x1130 MM
Cabin Size	400x400 MM	500x500 MM	600x600 MM	800x800 MM	1000x1000 MM
Door Opening Size	400x600 MM	500x800 MM	600x800 MM	800x800 MM	1000x1000 MM
DIAGONAL ENTRY	GRS 400	GRS 500	GRS 600	GRS 800	GRS 1000
Structural Opening	650x650 MM	750x750 MM	850x850 MM	1050x1050 MM	1250x1250 MM
Tower Outer Size	630x630 MM	730x730 MM	830x830 MM	1030x1030 MM	1230x1230 MM
Cabin Size	400x500 MM	500x600 MM	600x700 MM	800x900 MM	1000x1100 MM
Door Opening Size	400x600 MM	500x800 MM	600x800 MM	800x800 MM	1000x1000 MM
GENERAL DIMENSION	GRS 400	GRS 500	GRS 600	GRS 800	GRS 1000
Load Capacity	50 KG	50 KG	100 KG	150 KG	150 KG
Headroom	2400 MM	2600 MM	2600 MM	2700 MM	2800 MM
Pit Height	900 MM	900 MM	900 MM	900 MM	900 MM

全国免费服务热线
National Free Service Hotline

400-113-6788




Meilun Rotation of the New World

梅轮转动新世界

Escalator Moving Walk

自动扶梯 / 自动人行道

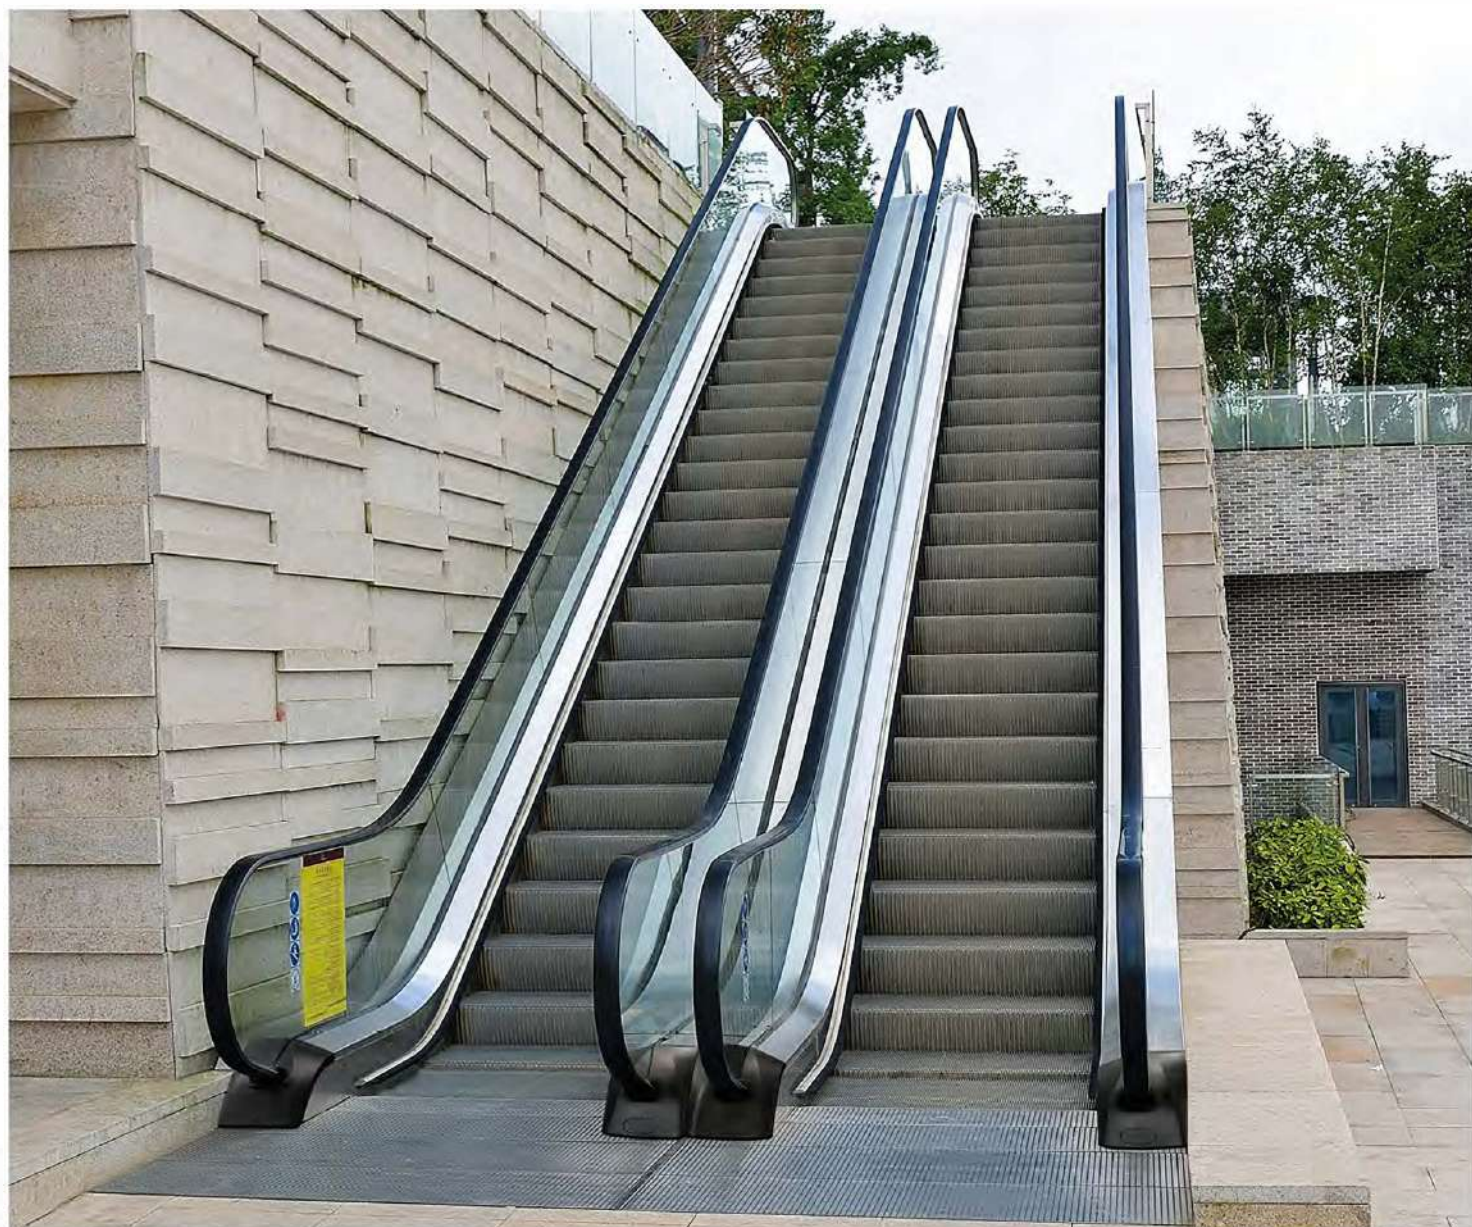

浙江梅轮电梯股份有限公司

ZHEJIANG MEILUN ELEVATOR CO.,LTD.

Moving walk

自动人行道

梅轮自动人行道将购物、乘机带入简约舒适的新境界。不仅能满足人流量巨大的输送问题，又能满足长距离步行和运送行李车、婴儿车、购物车、残疾车等要求，大大方便了人们的出行与购物。


Meilun auto-walk elevates the shopping to a newly concise and comfortable realm, It not only satisfies the conveying problem of large passenger flow, but also meets the requirements of long-distance walk, carrying luggage cart, baby's cart, shopping cart, the vehicle for the handicapped etc. It is greatly convenient for people's outing and shopping.

节省空间

Space-saving

结构紧凑，应变自如：短踏板大大缩小了空间跨度，使整机结构更为紧凑，可灵活应建筑格局，为客户节省宝贵的建筑空间。分水平型，倾斜型的产品规划系列，可使客户依其布局构想自由选择。

Compact structure, ease strain: Short pallets can greatly reduce space span, which can flexibly fits the building structure and save the construction space for the customer. It comprises H version(horizontal), I version (incline) and C version (compact) can let the customer have a free choice on his original layout.

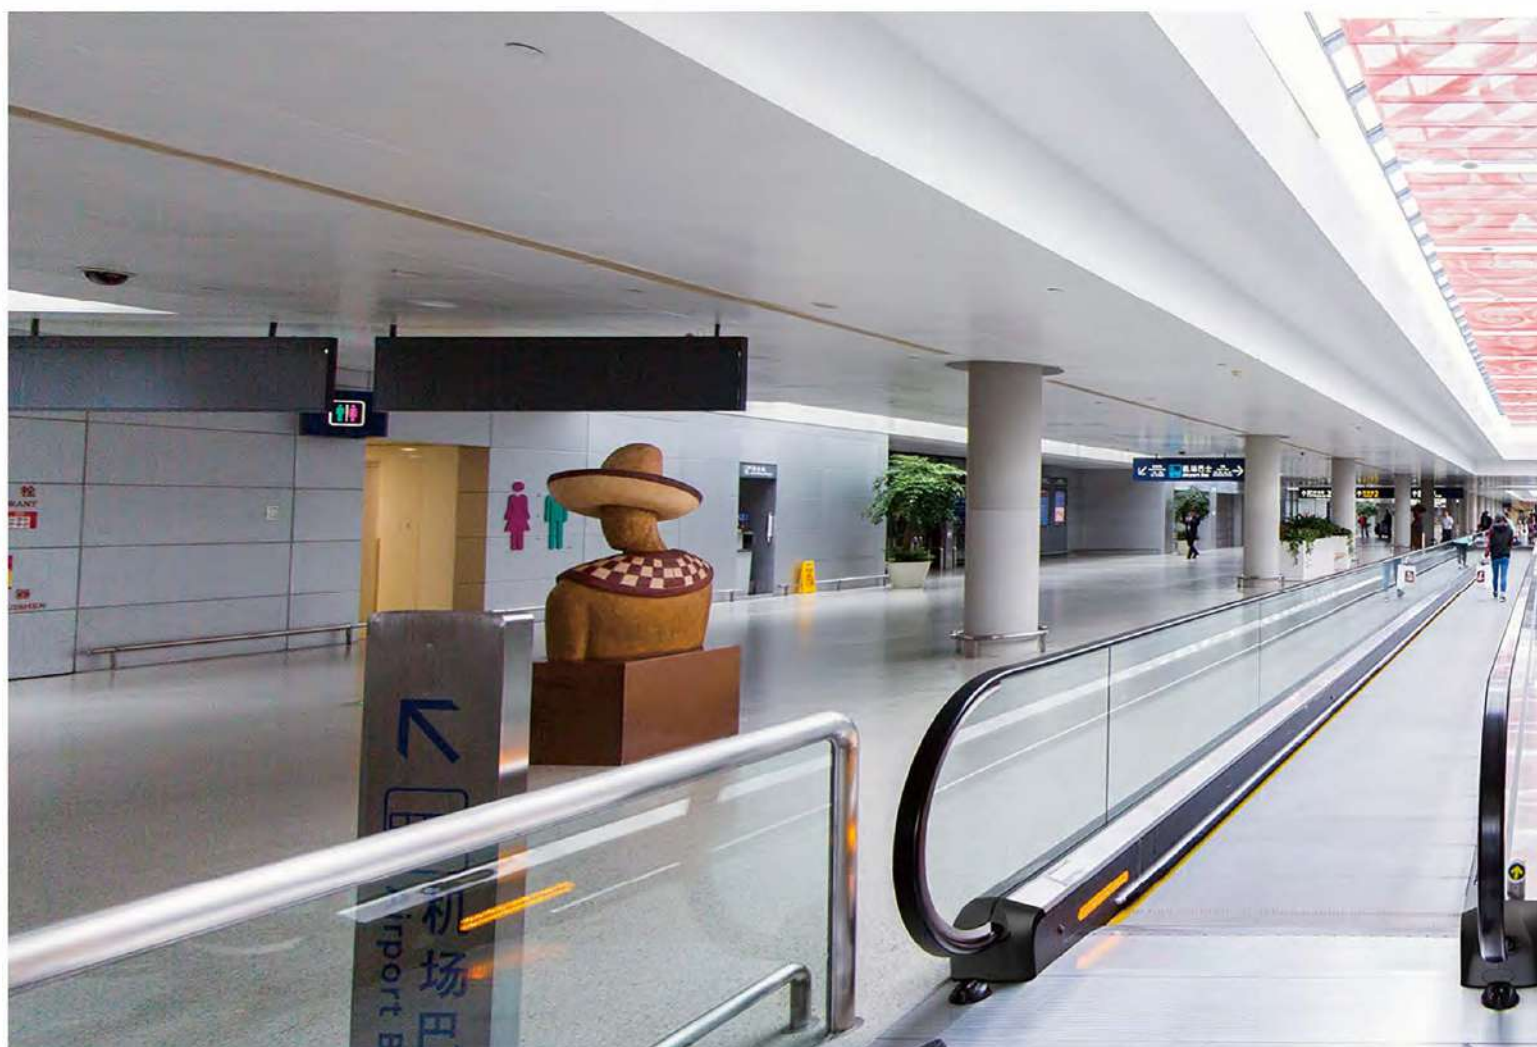

稳定可靠

Stable and reliable

稳定可靠的投资：短踏板与传送链直接相连，自动人行道运行更为宁静平稳，整机的使用周期得以大大延长，产品维护也更加方便。特别设计的大滚轮扶手驱动，运行噪音低，驱动力大，改善扶手运行条件，使扶手带的使用寿命更长。独特的矩形方管结构具有强大的负载能力，极大地提高了整机运行的稳定性，延长了产品的使用寿命。

Stable and reliable investment: The pallet directly connecting with the chain which makes the running more smoothly and quietly, thus the service life is extended and its maintenance can be easily conducted, Special designed big wheel handrail drive runs in low noise and big power, which improves the running condition of handrail, its life is hence prolonged, Unique tube structure has a big load capacity, which greatly improves the overall stability and service life.

缤纷多彩

Colorful and enchanted

缤纷多彩的装饰效果：扶手带款式多样，可满足不同环境的个性化需求。冲压花纹式前沿板，美观大方，更具立体感。内外盖板采用高质量的不锈钢。


Colorful decoration: Various styled handrail can meet personal demand in different environments, Beautiful stainless steel floor plate has a three-dimension effect, Inner and outer decking adopts stainless steel.

更经济性

More economical

无可比拟的经济性：自动人行道充分运用先进的制造工艺，大大提高了产品的性能，延长了整机的使用周期，直接的效应就是减少了客户的营运成本，可选用的变频驱动技术，节能效果显著，最大程度地降低整机的运行成本。

Incomparable economical: The moving walk fully utilizes advanced manufacturing process, greatly improves product performance and service life, the most direct result is that the operation cost of the customer is reduced, The optional VF drive technology yields great energy-saving, reducing the running cost to the maximum.

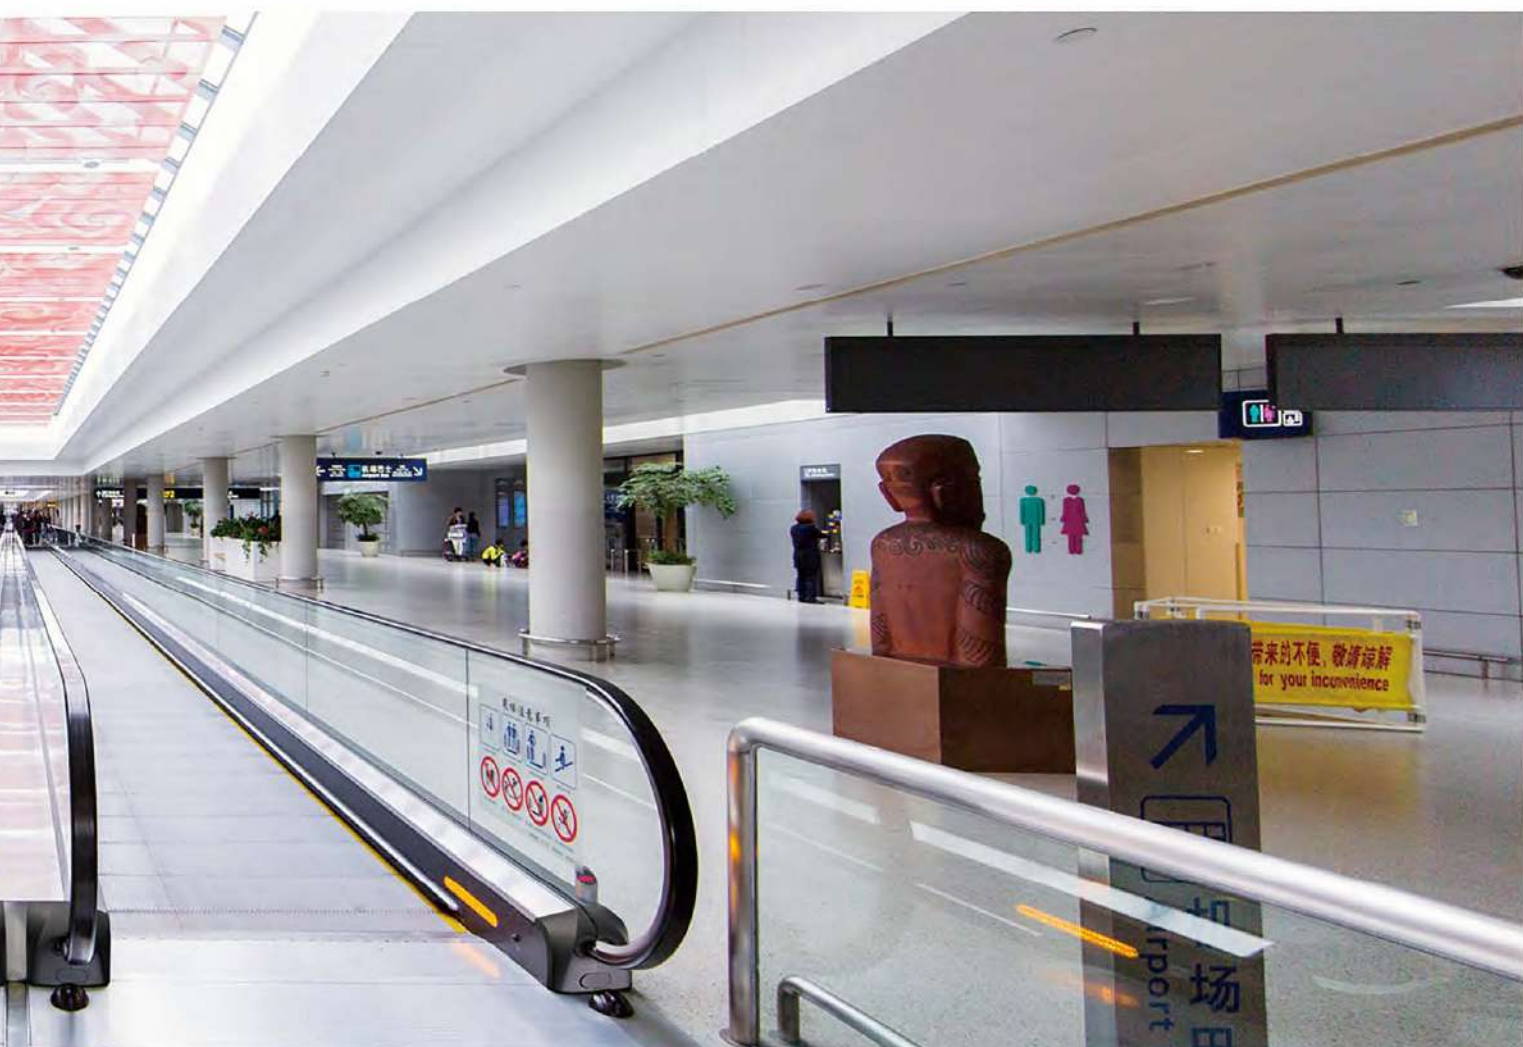


Safety device

安全装置

自动扶梯安全装置

Escalator safety device

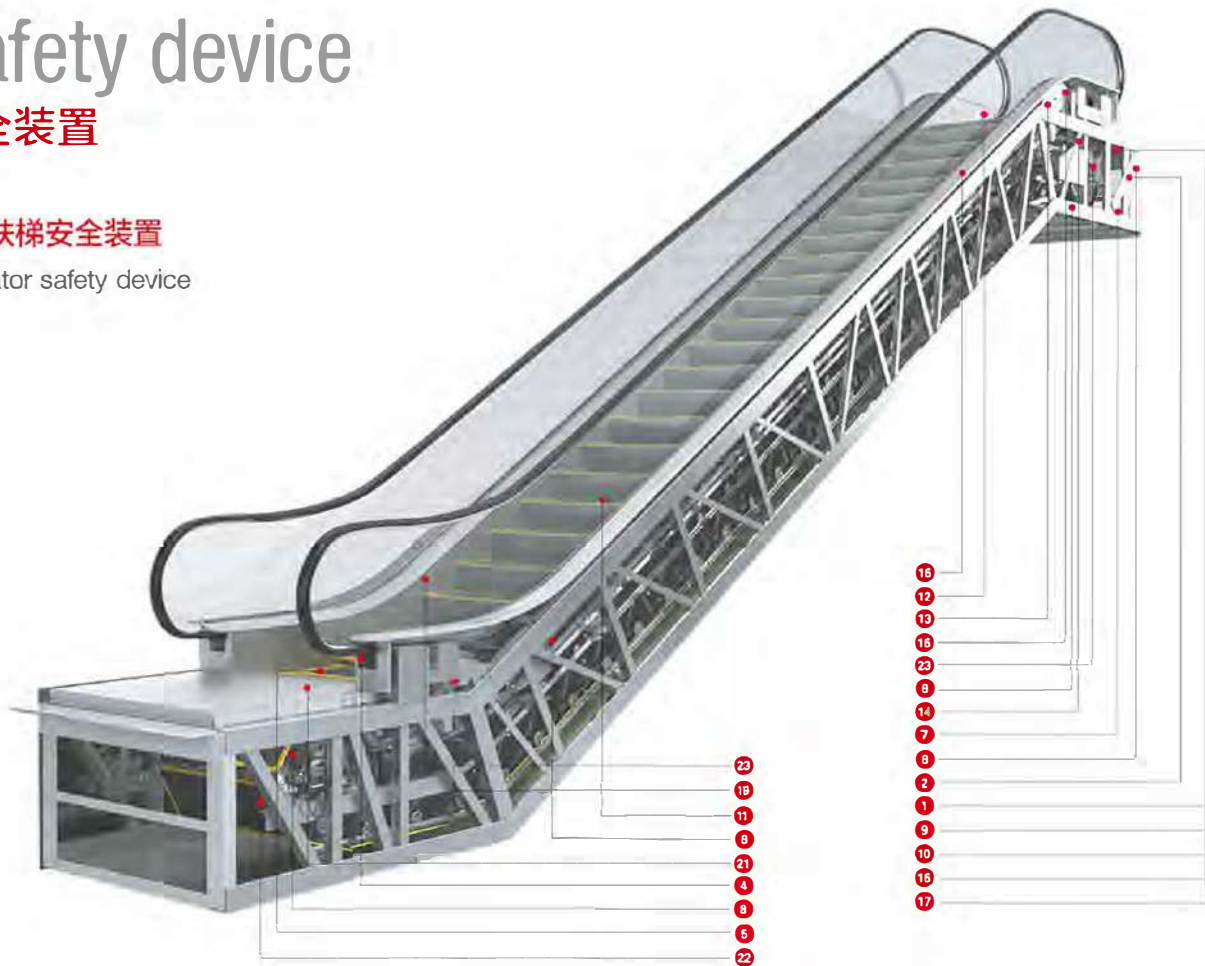

标准安全装置

Standard safety device

1. 缺相、错相保护 Lack of phase, error phase protection

如果发生缺相或错相, 自动扶梯(自动人行道)将自动停止。
If lack phase or error phase has been checked out, the escalator (auto-walk) will automatically stop the operation.

2. 马达超载保护 Motor over-load protection

电流超过额定电流的 15% 则扶梯自动停止运行。
When the current exceeds 15% of the current rating, the escalator will automatically stop the operation.

3. 电器回路保护 Electrical appliance loop protection

提供自动电路断开装置以保护自动扶梯(自动人行道)的电路和电源部件。
It offers the automatic circuit disconnecting device to protect the circuit and mains components of the escalator (auto-walk).

4. 扶手带入口保护 Handrail inlet protection

当外物被夹在扶手带入口时, 自动扶梯(自动人行道)会自动停止运行。
When some foreign substance has been clipped in the handrail inlet, the escalator (auto-walk) will automatically stop the operation.

5. 梳齿板安全保护装置 Comb plate safety device

当外物被夹在梳齿时, 自动扶梯(自动人行道)将自动停止运行。
When some foreign substance has been clipped in or between the combs, the escalator (auto-walk) will automatically stop the operation.

6. 梯级塌陷保护装置 Step sagging protection device

当发现梯级有异常的弯曲时, 自动扶梯(自动人行道)会在梯级进入梳齿板前停止运行。
When there is abnormal step bending, the escalator (auto-walk) will stop the operation before the step entering into the comb plate.

7. 驱动链断裂保护 Broken drive-chain safety device

当驱动链被过度拉伸或断裂时, 自动扶梯(自动人行道)将自动停止运动。
When the drive-chain has been over-stretched or it is broken, the escalator (auto-walk) will automatically stop the operation.

8. 梯级链断裂保护 Broken step chain protection

当梯级(踏板)链被过度拉伸或断裂, 自动扶梯(自动人行道)将自动停止运行。
When the step (pallet) chain has been over-stretched or it is broken, the escalator (auto-walk) will automatically stop the operation.

9. 超速保护 Over-speed protection

当自动扶梯(自动人行道)超速, 将自动停止运行。
When there is over-speed to the escalator (auto-walk), it will automatically stop the operation.

10. 非操作逆转保护 Direction reversal protection

当逆转操作而违反了预定的运行方向, 自动扶梯(自动人行道)将自动停止运行。
When it comes the unintentional reversal of the direction of travel, the escalator (auto-walk), will automatically stop the operation.

11. 警戒线 Security line


黄色合成树脂警戒线位于自动扶梯踏板的前部和两边, 以防止乘客踏入相邻梯级的边缘及梯级和围裙板之间。在梯级两边的警戒线高于踏板表面(自动人行道提供可选黄色喷漆警戒线)。
The yellow synthetic resin security line is located in the front position and two sides of the escalator tread so that the passengers will not tread in-between the edge of the adjacent step and the lift group lengthened skirt panel. The security line on both sides of the step is higher than tread surface. (The auto-walk offers the selective yellow spray-painted security line.)

12. 紧急停止按钮 Emergency button

当按下该按钮时, 自动扶梯(自动人行道)将停止运行。
When the button has been pressed down, the escalator (auto-walk), will stop the operation.

自动人行道安全装置

Auto-walk safety device

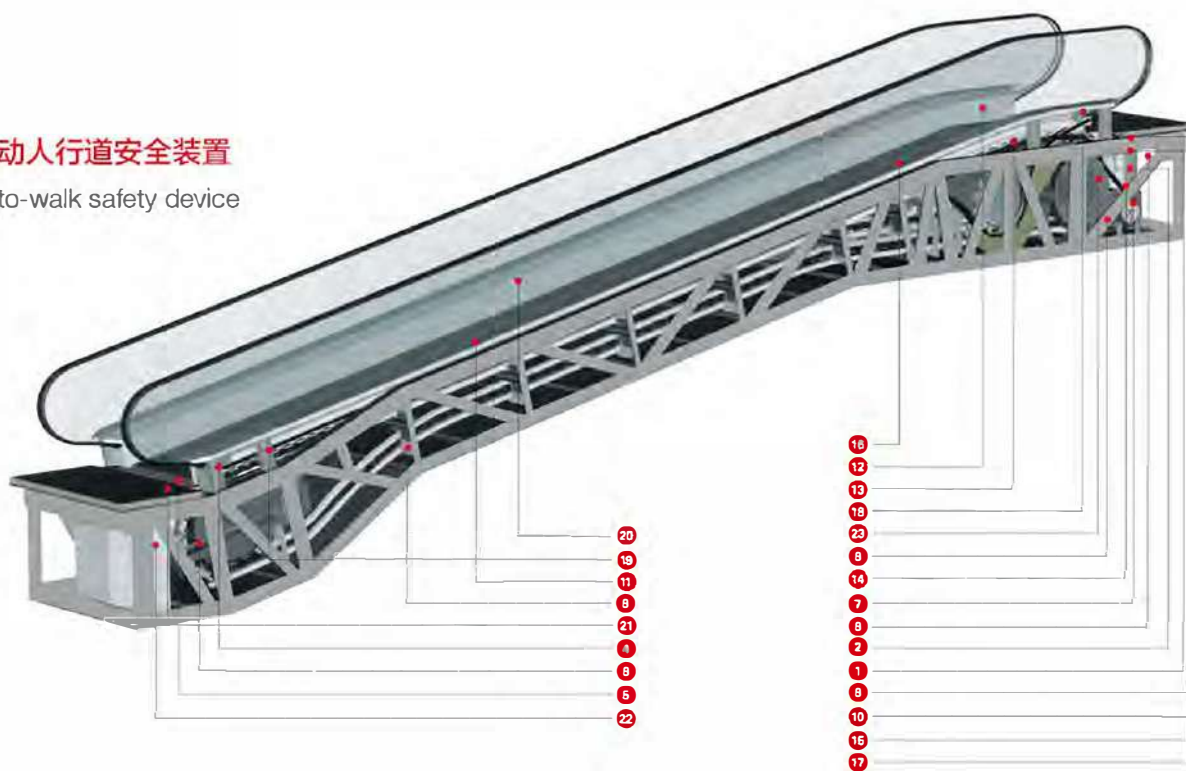

13. 围裙板保护 Skirt panel protection

当外物被夹在围裙板和梯级之间时,自动扶梯(自动人行道)将自动停止运行。

When some foreign substance has been clipped in between the skirt panel and the step, the escalator (auto-walk) will automatically stop the operation.

14. 制动器保护 Brake protection

当电力不足或任一安全装置动作时,制动装置将通过弹簧弹力作用使制动功能生效,使自动扶梯(自动人行道)停止运行。

When the electric force falls short of supply or it acts any of the safety device, the brake function goes into effect by the safety device through the spring resilience action. In this way, the escalator (auto-walk) stops the operation.

15. 检修安全开关 Safety inspection switch

检修保养时,防止扶梯启动的安全装置。

It is a safety device to prevent from the escalator starting during the inspection and maintenance.

16. 警界灯 Warning lights

扶梯上下端,梯级下部装有照明以提醒乘梯人注意安全。

Illumination exists in the upper and lower ends of the escalator, in the lower part of the step in order to remind the passengers of the security matters.

17. 启动警铃装置 Alarm bell starting device

扶梯启动时警铃响起,以提醒乘客安全。

The alarm bell rings when it starts the escalator in order to remind the passengers of the security matters.

18. 扶手带断带保护装置 Control device for handrail breakage

当扶手带断裂时,自动扶梯将停止运行。

When the handrail is broken, the escalator will automatically stop the operation.

19. 梯级缺失监测装置 Step&pallet missing protection

在正常运行条件下,当检测到梯级或踏板缺失时,自动扶梯或自动人行道将停止运行,故障排除并且手动复位后才能再启动。

检修状态时不检测梯级缺失

Under normal mode, when detect the missing of step or pallet, escalator or moving walk will stop working.

When its under inspection mode, not detecting.

20. 扶手带速度监控功能 Handrail speed monitor

在正常运行条件下,当扶手带运行速度偏离梯级、踏板或胶带的实际速度大于-15%且持续时间大于15秒时,自动扶梯或自动人行道将停止运行。检修状态时不检测扶手带速度。

Under normal mode, when the handrail deviation of more than -15% to the actual speed for more than 15s, escalator or moving walk will stop working.

When its under inspection mode, not detecting

21. 盖板打开检测装置 Floor plate open protection

在正常运行条件下,当检修盖板打开时,该检测开关动作,安全回路断开,自动扶梯或自动人行道正常状态时不能运行。

当检修状态时,该检测开关将由手持检修盒上的停止开关替代。

Under normal mode, when the floor plate is open, the escalator & moving walk will stop working.

When its under inspection mode, this switch will be instead by the stop button on the manual controller.

22. 主机抱闸打开检测功能 Motor brake lifting detecting

自动扶梯或自动人行道启动后,检测主机抱闸是否打开(释放),如果没有打开,扶梯或人行道将停止运行,故障排除并且手动复位后才能再启动。

After starting the escalator & moving walk, if there is non-lifting of the brake system, escalator & moving walk will stop working.

23. 主机手动盘车装置检测开关 Motor hand winding device protection

当打开自动扶梯或自动人行道主机防护罩进行手动盘车时,检测开关动作切断安全回路,自动扶梯将不能运行。

When the hand winding device is used in the motor, the escalator and moving walk will stop working.

24. 梯级制动距离检测装置 Step brake distance detect device

自动扶梯或自动人行道制动距离超过1.2米时,系统将保护不能启动,故障排除并且手动复位后才能再启动。

When the brake distance over 1.2m, the system will stop working.

25. 围裙板防夹装置(裙板毛刷) Skirting brush

该装置应符合GB16899-2011第5.5.3.4条的规定。

Should follow GB16899-2011 no. 5.5.3.4 rules.

Arrangements planning guide


可行布置方案

单台扶梯

Single unit arrangement

采用单台扶梯连接两个层面。它适合客流量主要朝一个方向流动的大楼。可作灵活的调整以满足乘客流动的需要(例如:早晨上行,晚上下行)。

particularly suitable for transporting passengers between two floor levels, where passenger flow is in one direction, although on-demand starting can be utilized to allow travel in both two directions, (e.g., up in the morning and down in the evening).

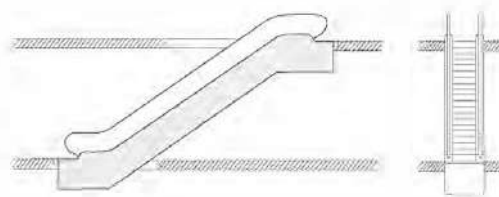


连续布置式(单向交通)

Continuous arrangement(one travel direction)

这种布置方式主要用于小型百货商店,以连续三个销售楼层。这种布置比断续布置所需要的空间更多一些。

Mainly suitable for small department stores, between three sales floor levels. More space required than the interrupted arrangement.

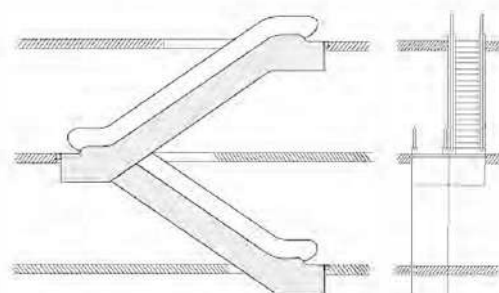


断续布置式(单向交通)

Interrupted arrangement(one travel direction)

这种布置多少会给乘客带来不便,但对商场业主却有利,因为在上行或下行扶梯间以及换乘扶梯间的空间间隔有可能让顾客看到特意布置的广告展品。

Passengers have to make a short detour to the next escalator, strategically placed displays alongside the route of this detour can help to increase sales by encouraging impulse buying.

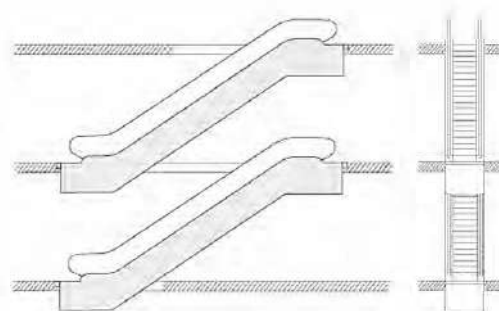


平行断续布置式(双向交通)

Multi-level parallel arrangement (interrupted traffic, two travel directions)

这种布置方式主要使用于客流量较大的商场和公交设施。当有三台或三台以上自动扶梯时,就应有可能按照客流改变运动方向。这种布置方式比较经济,因为这样无需内侧挡板。

Mainly used in department stores and public buildings with a heavy traffic flow. When there are three or more escalators, the possibility to reverse the direction of travel of both escalators depending on the usage or traffic flow, this arrangement is economical, since no decorative truss cladding required.

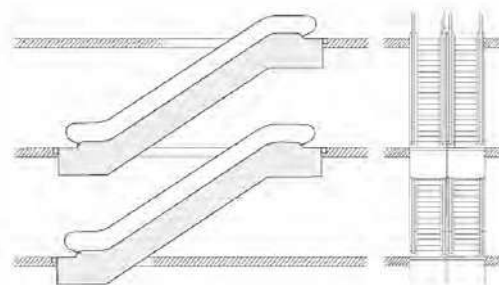


交叉连续布置式(双向交通)

Multi-level criss-cross arrangement (continuous traffic flow, two travel directions)

这种布置方式主要使用于大型百货商场、公共建筑和公共交通场所,这些地方的楼层之间的运送次数应保持尽可能少。

Mainly used in major department stores, public buildings and public transport buildings, reduce congestion at the landing area by separating upwards and downwards travelling passengers.

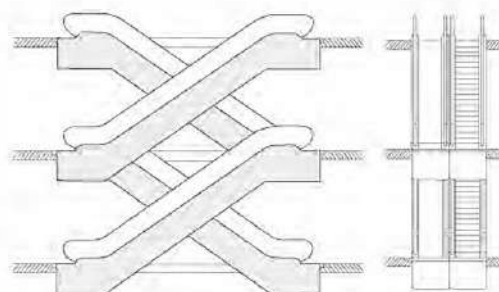

Installation notice

土建安装须知

除了确保合同土建的各尺寸和要求，
以下的要求也应达到。


Besides complying with the drawing of the contract, attention should also be drawn to the following.

为了确保扶梯和人行道的使用安全，自由空间必须在各层站处提供足够大的空间。
(参见右最小尺寸图)

To ensure the safety of the escalator and moving walk, free space should be large enough in the landing area. (See the minimum size on right)

C = 扶手带中心宽度

C = handrail belt width

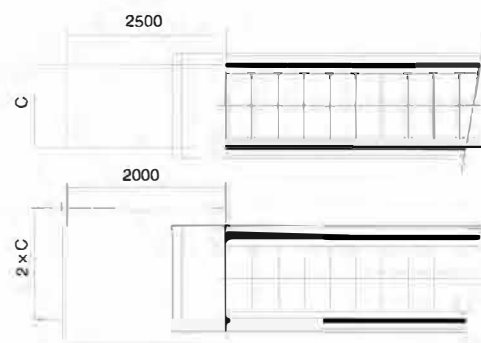

顶空安全距离


Vertical safety distance

在梯级 / 踏板上的任意点上，至少有 2.3 米不受任何障碍的安全距离。

There should be at least 2.3m upside safety distance starting upward from the step board.

特别注意！如果一台扶梯上的另一台扶梯的提升高度 < 3.3 米，就不可能达到 2.3 米的顶空安全距离。

Notice: If the vertical rise of one escalator, which is installed above another one, is less than 3.3m, the upside safety distance can not reach 2.3m.

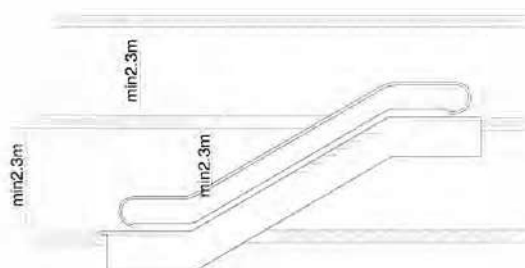

扶梯(人行道)安装必须保证的水平安全问题

Escalators and moving walk horizontal safety distance

扶手带外边缘至墙体或其他障碍物的水平安全距离必须大于 80mm。

The horizontal distance between the handrail edge and the wall or other objects should be more than 80mm.

梯级 / 踏板区上方垂直安全距离必须大于 2.3m。

The vertical distance above the step board should be more than 2.3m.

扶手带区上方垂直安全距离必须大于 2.1m。


The vertical distance above the handrail space should be more than 2.1m.

对楼面开孔或扶梯 / 人行道交叉布置，扶手带中心到障碍物的水平安全距离必须大于 0.5m。

In case of floor spaces or the cross layout of escalators and moving walk, the safety distance between the handrail center and the object should be more than 0.5m.

如未达到要求，需设置专门的防护装置和防撞挡板。

If the above-mentioned requirements cannot be met, a special protection device and a bumper rail should be used.

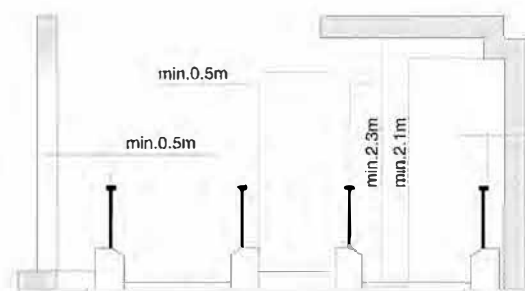



Doğuş Asansör Malzemeleri Sanayi ve Ticaret Ltd. Şti.

Merkez : Fikirtepe, Dumlupınar Mh. Hızırbey Cd. Mektep Sk. No:16 Kadıköy - İstanbul
Tel : + 90 216 565 03 55 (3 Hat) Fax : + 90 216 565 02 51

Fabrika : Y.Dudullu, İmes Sanayi Sitesi C Blok 309 Sokak No: 5 Ümraniye - İstanbul
Tel : + 90 216 527 03 56 Fax : + 90 216 527 03 59

www.dogus-elevator.com e-mail: dogus@dogus-elevator.com